



單向推力滾珠軸承


內徑 10~50 mm

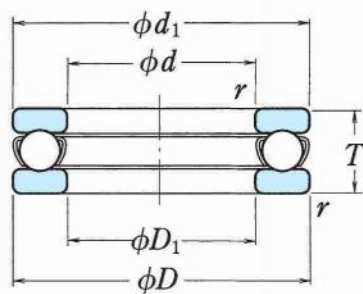

平面座型

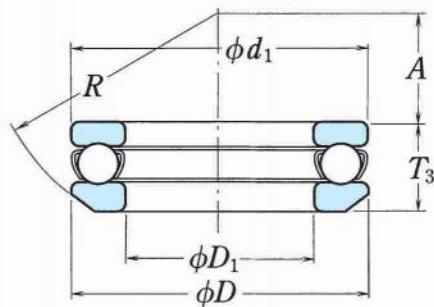

調心球面型

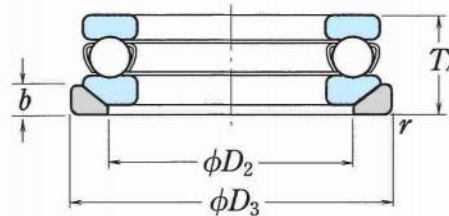

帶球面座圈


主要尺寸 (mm)						基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代號		
d	D	T	T_3	T_4	r (最小)	C_a	C_{0a}	C_a	C_{0a}	脂潤滑	油潤滑	平面座型	調心 球面型	帶球面 座圈
10	24	9	—	—	0.3	10 100	14 000	1 030	1 420	6 700	10 000	51100	—	—
	26	11	11.6	13	0.6	12 800	17 100	1 300	1 740	6 000	9 000	51200	53200	53200 U
12	26	9	—	—	0.3	10 400	15 400	1 060	1 570	6 700	10 000	51101	—	—
	28	11	11.4	13	0.6	13 300	19 000	1 350	1 940	5 600	8 500	51201	53201	53201 U
15	28	9	—	—	0.3	10 600	16 800	1 080	1 710	6 300	9 500	51102	—	—
	32	12	13.3	15	0.6	16 700	24 800	1 710	2 530	5 000	7 500	51202	53202	53202 U
17	30	9	—	—	0.3	11 400	19 500	1 170	1 990	6 000	9 000	51103	—	—
	35	12	13.2	15	0.6	17 300	27 300	1 760	2 780	4 800	7 500	51203	53203	53203 U
20	35	10	—	—	0.3	15 100	26 600	1 540	2 710	5 300	8 000	51104	—	—
	40	14	14.7	17	0.6	22 500	37 500	2 290	3 850	4 300	6 300	51204	53204	53204 U
25	42	11	—	—	0.6	19 700	37 000	2 010	3 800	4 800	7 100	51105	—	—
	47	15	16.7	19	0.6	28 000	50 500	2 860	5 150	3 800	5 600	51205	53205	53205 U
	52	18	19.8	22	1	36 000	61 500	3 650	6 250	3 200	5 000	51305	53305	53305 U
	60	24	26.4	29	1	56 000	89 500	5 700	9 100	2 600	4 000	51405	53405	53405 U
30	47	11	—	—	0.6	20 600	42 000	2 100	4 300	4 300	6 700	51106	—	—
	52	16	17.8	20	0.6	29 500	58 000	3 000	5 950	3 400	5 300	51206	53206	53206 U
	60	21	22.6	25	1	43 000	78 500	4 400	8 000	2 800	4 300	51306	53306	53306 U
	70	28	30.1	33	1	73 000	126 000	7 450	12 800	2 200	3 400	51406	53406	53406 U
35	52	12	—	—	0.6	22 100	49 500	2 250	5 050	4 000	6 000	51107	—	—
	62	18	19.9	22	1	39 500	78 000	4 050	7 950	3 000	4 500	51207	53207	53207 U
	68	24	25.6	28	1	56 000	105 000	5 700	10 700	2 400	3 800	51307	53307	53307 U
	80	32	34	37	1.1	87 500	155 000	8 950	15 800	2 000	3 000	51407	53407	53407 U
40	60	13	—	—	0.6	27 100	63 000	2 770	6 400	3 600	5 300	51108	—	—
	68	19	20.3	23	1	47 500	98 500	4 850	10 000	2 800	4 300	51208	53208	53208 U
	78	26	28.5	31	1	70 000	135 000	7 100	13 700	2 200	3 400	51308	53308	53308 U
	90	36	38.2	42	1.1	103 000	188 000	10 500	19 100	1 700	2 600	51408	53408	53408 U
45	65	14	—	—	0.6	28 100	69 000	2 860	7 050	3 400	5 000	51109	—	—
	73	20	21.3	24	1	48 000	105 000	4 900	10 700	2 600	4 000	51209	53209	53209 U
	85	28	30.1	33	1	80 500	163 000	8 200	16 700	2 000	3 000	51309	53309	53309 U
	100	39	42.4	46	1.1	128 000	246 000	13 000	25 100	1 600	2 400	51409	53409	53409 U
50	70	14	—	—	0.6	29 000	75 500	2 960	7 700	3 200	4 800	51110	—	—
	78	22	23.5	26	1	49 000	111 000	5 000	11 400	2 400	3 600	51210	53210	53210 U
	95	31	34.3	37	1.1	97 500	202 000	9 950	20 600	1 800	2 800	51310	53310	53310 U
	110	43	45.6	50	1.5	147 000	288 000	15 000	29 400	1 400	2 200	51410	53410	53410 U




慶順五金·軸承
WWW.CS1970.COM.TW

單向推力滾珠軸承


內徑 55~100 mm

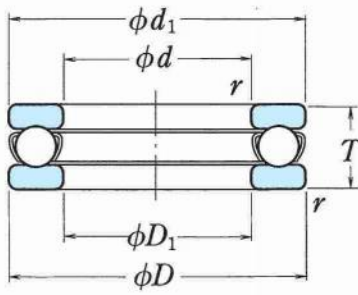

平面座型

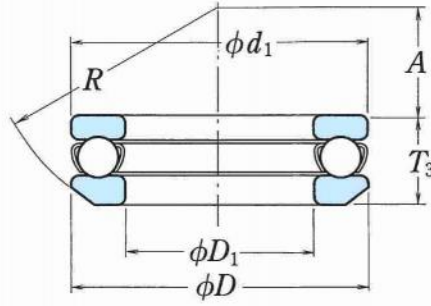

調心球面型

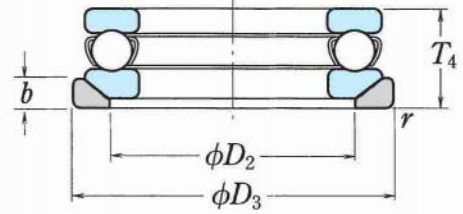

帶球面座圈

主要尺寸 (mm)						基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代號 ⁽¹⁾		
d	D	T	T ₃	T ₄	r (最小)	C _a	C _{0a}	C _a	C _{0a}	脂潤滑	油潤滑	平面座型	調心球面型	帶球面座圈
55	78	16	—	—	0.6	35 000	93 000	3 600	9 500	2 800	4 300	51111	—	—
	90	25	27.3	30	1	70 000	159 000	7 150	16 200	2 200	3 200	51211	53211	53211 U
	105	35	39.3	42	1.1	115 000	244 000	11 800	24 900	1 600	2 400	51311	53311	53311 U
	120	48	50.5	55	1.5	181 000	350 000	18 500	35 500	1 300	1 900	51411	53411	53411 U
60	85	17	—	—	1	41 500	113 000	4 250	11 500	2 600	4 000	51112	—	—
	95	26	28	31	1	71 500	169 000	7 300	17 200	2 000	3 000	51212	53212	53212 U
	110	35	38.3	42	1.1	119 000	263 000	12 100	26 800	1 600	2 400	51312	53312	53312 U
	130	51	54	58	1.5	202 000	395 000	20 600	40 500	1 200	1 800	51412	53412	53412 U
65	90	18	—	—	1	42 000	117 000	4 300	12 000	2 400	3 800	51113	—	—
	100	27	28.7	32	1	75 500	189 000	7 700	19 200	1 900	2 800	51213	53213	53213 U
	115	36	39.4	43	1.1	123 000	282 000	12 500	28 700	1 500	2 400	51313	53313	53313 U
	140	56	60.2	65	2	234 000	495 000	23 800	50 500	1 100	1 700	51413	53413	53413 U
70	95	18	—	—	1	43 500	127 000	4 450	12 900	2 400	3 600	51114	—	—
	105	27	28.8	32	1	74 000	189 000	7 550	19 200	1 900	2 800	51214	53214	53214 U
	125	40	44.2	48	1.1	137 000	315 000	14 000	32 000	1 400	2 000	51314	53314	53314 U
	150	60	63.6	69	2	252 000	555 000	25 700	56 500	1 000	1 500	51414	53414	53414 U
75	100	19	—	—	1	43 500	131 000	4 450	13 400	2 200	3 400	51115	—	—
	110	27	28.3	32	1	78 000	209 000	7 950	21 300	1 800	2 800	51215	53215	53215 U
	135	44	48.1	52	1.5	159 000	365 000	16 200	37 500	1 300	1 900	51315	53315	53315 U
	160	65	69	75	2	254 000	560 000	25 900	57 000	950	1 400	51415	53415	53415 U
80	105	19	—	—	1	45 000	141 000	4 600	14 400	2 200	3 400	51116	—	—
	115	28	29.5	33	1	79 000	218 000	8 050	22 300	1 800	2 600	51216	53216	53216 U
	140	44	47.6	52	1.5	164 000	395 000	16 700	40 000	1 300	1 900	51316	53316	53316 U
	170	68	72.2	78	2.1	272 000	620 000	27 800	63 500	900	1 300	51416	53416	53416 U
85	110	19	—	—	1	46 500	150 000	4 700	15 300	2 200	3 200	51117	—	—
	125	31	33.1	37	1	96 000	264 000	9 800	26 900	1 600	2 400	51217	53217	53217 U
	150	49	53.1	58	1.5	207 000	490 000	21 100	50 000	1 100	1 700	51317	53317	53317 U
	180	72	77	83	2.1	310 000	755 000	31 500	77 000	850	1 300	51417 X	53417 X	53417 XU
90	120	22	—	—	1	60 000	190 000	6 150	19 400	1 900	3 000	51118	—	—
	135	35	38.5	42	1.1	114 000	310 000	11 600	31 500	1 400	2 200	51218	53218	53218 U
	155	50	54.6	59	1.5	214 000	525 000	21 900	53 500	1 100	1 700	51318	53318	53318 U
	190	77	81.2	88	2.1	330 000	825 000	33 500	84 000	800	1 200	51418 X	53418 X	53418 XU
100	135	25	—	—	1	86 000	268 000	8 750	27 300	1 700	2 600	51120	—	—
	150	38	40.9	45	1.1	135 000	375 000	13 700	38 500	1 300	2 000	51220	53220	53220 U
	170	55	59.2	64	1.5	239 000	595 000	24 300	61 000	1 000	1 500	51320	53320	53320 U
	210	85	90	98	3	370 000	985 000	38 000	100 000	710	1 100	51420 X	53420 X	53420 XU


註 (1) 代號帶有X記號的軸承尺寸是其軸軌道輪外徑 d_1 小於軸承箱軌道盤外徑 D 的尺寸。




慶順五金·軸承
WWW.CS1970.COM.TW

單向推力滾珠軸承


內徑 110~190 mm

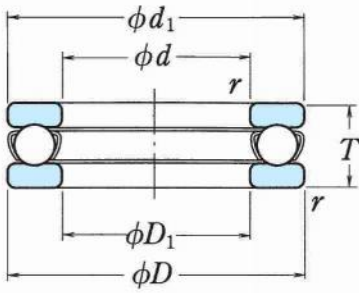

平面座型

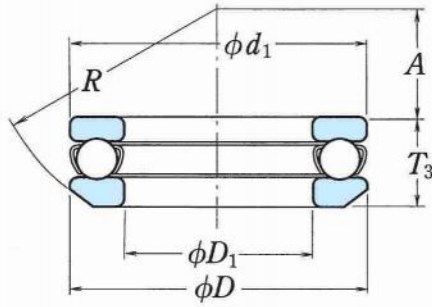

調心球面型

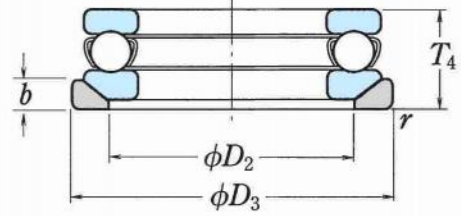

帶球面座圈

主要尺寸 (mm)						基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號 ⁽¹⁾		
d	D	T	T ₃	T ₄	r (最小)	C _a	C _{0a}	C _a	C _{0a}	脂潤滑	油潤滑	平面座型	調 心 球面型	帶球面 座 圈
110	145	25	—	—	1	88 000	288 000	8 950	29 400	1 700	2 400	51122	—	—
	160	38	40.2	45	1.1	136 000	395 000	13 900	40 000	1 300	1 900	51222	53222	53222 U
	190	63	67.2	72	2	282 000	755 000	28 800	77 000	900	1 300	51322 X	53322 X	53322 XU
	230	95	99.7	109	3	415 000	1 150 000	42 000	118 000	630	950	51422 X	53422 X	53422 XU
120	155	25	—	—	1	90 000	310 000	9 150	31 500	1 600	2 400	51124	—	—
	170	39	40.8	46	1.1	141 000	430 000	14 400	44 000	1 200	1 800	51224	53224	53224 U
	210	70	74.1	80	2.1	330 000	930 000	33 500	95 000	800	1 200	51324 X	53324 X	53324 XU
	250	102	107.3	118	4	480 000	1 400 000	49 000	142 000	600	900	51424 X	53424 X	53424 XU
130	170	30	—	—	1	105 000	350 000	10 700	36 000	1 400	2 000	51126	—	—
	190	45	47.9	53	1.5	183 000	550 000	18 700	56 000	1 100	1 600	51226 X	53226 X	53226 XU
	225	75	80.3	86	2.1	350 000	1 030 000	35 500	105 000	750	1 100	51326 X	53326 X	53326 XU
	270	110	115.2	128	4	525 000	1 590 000	53 500	162 000	530	800	51426 X	53426 X	53426 XU
140	180	31	—	—	1	107 000	375 000	11 000	38 500	1 300	2 000	51128 X	—	—
	200	46	48.6	55	1.5	186 000	575 000	18 900	59 000	1 000	1 500	51228 X	53228 X	53228 XU
	240	80	84.9	92	2.1	370 000	1 130 000	37 500	115 000	670	1 000	51328 X	53328 X	53328 XU
	280	112	117	131	4	550 000	1 750 000	56 500	178 000	530	800	51428 X	53428 X	53428 XU
150	190	31	—	—	1	110 000	400 000	11 200	41 000	1 300	1 900	51130 X	—	—
	215	50	53.3	60	1.5	238 000	735 000	24 300	75 000	950	1 400	51230 X	53230 X	53230 XU
	250	80	83.7	92	2.1	380 000	1 200 000	39 000	123 000	670	1 000	51330 X	53330 X	53330 XU
	300	120	125.9	140	4	620 000	2 010 000	63 000	205 000	480	710	51430 X	53430 X	53430 XU
160	200	31	—	—	1	113 000	425 000	11 500	43 500	1 200	1 900	51132 X	—	—
	225	51	54.7	61	1.5	249 000	805 000	25 400	82 000	900	1 400	51232 X	53232 X	53232 XU
	270	87	91.7	100	3	475 000	1 570 000	48 500	160 000	600	900	51332 X	53332 X	53332 XU
	320	130	135.3	150	5	650 000	2 210 000	66 000	226 000	450	670	51432 X	53432 X	53432 XU
170	215	34	—	—	1.1	135 000	510 000	13 800	52 000	1 100	1 700	51134 X	—	—
	240	55	58.7	65	1.5	280 000	915 000	28 500	93 000	850	1 300	51234 X	53234 X	53234 XU
	280	87	91.3	100	3	465 000	1 570 000	47 500	160 000	600	900	51334 X	53334 X	53334 XU
	340	135	141	156	5	715 000	2 480 000	73 000	253 000	430	630	51434 X	53434 X	53434 XU
180	225	34	—	—	1.1	136 000	530 000	13 800	54 000	1 100	1 700	51136 X	—	—
	250	56	58.2	66	1.5	284 000	955 000	28 900	97 000	800	1 200	51236 X	53236 X	53236 XU
	300	95	99.3	109	3	480 000	1 680 000	49 000	171 000	560	850	51336 X	53336 X	53336 XU
	360	140	148.3	164	5	750 000	2 730 000	76 500	278 000	400	600	51436 X	53436 X	53436 XU
190	240	37	—	—	1.1	172 000	655 000	17 500	67 000	1 000	1 600	51138 X	—	—
	270	62	65.7	73	2	320 000	1 110 000	32 500	113 000	750	1 100	51238 X	53238 X	53238 XU
	320	105	111	121	4	550 000	1 960 000	56 000	199 000	500	750	51338 X	53338 X	53338 XU


註 (1) 代號帶有X記號的軸承尺寸是其軸軌道輪外徑 d_1 小於軸承箱軌道盤外徑 D 的尺寸。




慶順五金·軸承
WWW.CS1970.COM.TW

單向推力滾珠軸承


內徑 200~360 mm

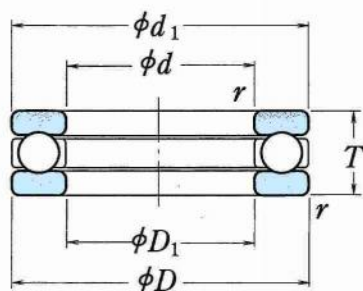

平面座型

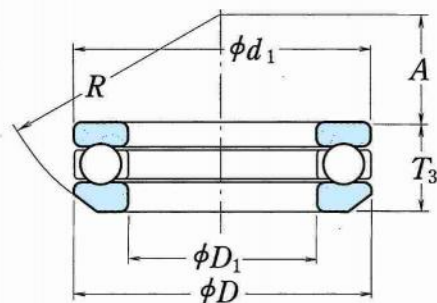

調心球面型

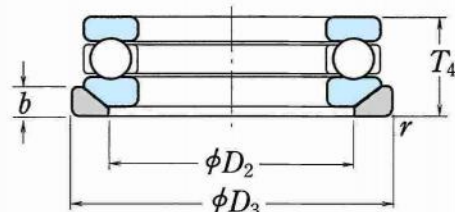

帶球面座圈

主要尺寸 (mm)						基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號 ⁽¹⁾		
d	D	T	T_3	T_4	r (最小)	C_a	C_{0a}	C_a	C_{0a}	脂潤滑	油潤滑	平面座型	調心球面型	帶球面座圈
200	250	37	—	—	1.1	173 000	675 000	17 600	69 000	1 000	1 500	51140 X	—	—
	280	62	65.3	74	2	315 000	1 110 000	32 500	113 000	710	1 100	51240 X	53240 X	53240 XU
	340	110	118.4	130	4	600 000	2 220 000	61 500	227 000	480	710	51340 X	53340 X	53340 XU
220	270	37	—	—	1.1	179 000	740 000	18 200	75 500	950	1 500	51144 X	—	—
	300	63	65.6	75	2	325 000	1 210 000	33 500	123 000	670	1 000	51244 X	53244 X	53244 XU
240	300	45	—	—	1.5	229 000	935 000	23 400	95 000	850	1 200	51148 X	—	—
	340	78	81.6	92	2.1	420 000	1 650 000	43 000	168 000	560	850	51248 X	53248 X	53248 XU
260	320	45	—	—	1.5	233 000	990 000	23 800	101 000	800	1 200	51152 X	—	—
	360	79	82.8	93	2.1	435 000	1 800 000	44 500	184 000	560	850	51252 X	53252 X	53252 XU
280	350	53	—	—	1.5	315 000	1 310 000	32 000	134 000	710	1 000	51156 X	—	—
	380	80	85	94	2.1	450 000	1 950 000	46 000	199 000	530	800	51256 X	53256 X	53256 XU
300	380	62	—	—	2	360 000	1 560 000	36 500	159 000	600	900	51160 X	—	—
	420	95	100.5	112	3	540 000	2 410 000	55 000	246 000	450	670	51260 X	53260 X	53260 XU
320	400	63	—	—	2	365 000	1 660 000	37 500	169 000	600	900	51164 X	—	—
	440	95	100.5	112	3	585 000	2 680 000	59 500	273 000	450	670	51264 X	53264 X	53264 XU
340	420	64	—	—	2	375 000	1 760 000	38 500	179 000	560	850	51168 X	—	—
	460	96	100.3	113	3	595 000	2 800 000	60 500	285 000	430	630	51268 X	53268 X	53268 XU
360	440	65	—	—	2	385 000	1 860 000	39 000	190 000	560	800	51172 X	—	—
	500	110	116.7	130	4	705 000	3 500 000	72 000	355 000	380	560	51272 X	53272 X	53272 XU


註 (1) 代號帶有X記號的軸承尺寸是其軸軌道輪外徑 d_1 小於軸承箱軌道盤外徑 D 的尺寸。




慶順五金·軸承
WWW.CS1970.COM.TW

雙向推力滾珠軸承


內徑 10~55 mm

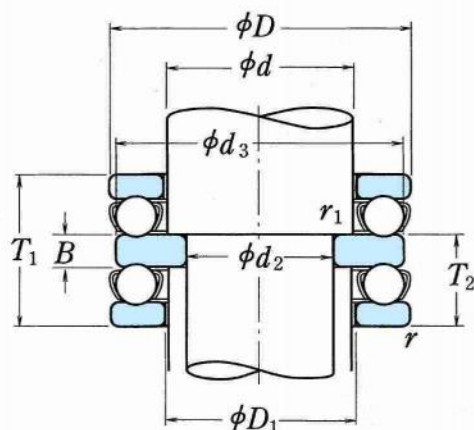

平面座型

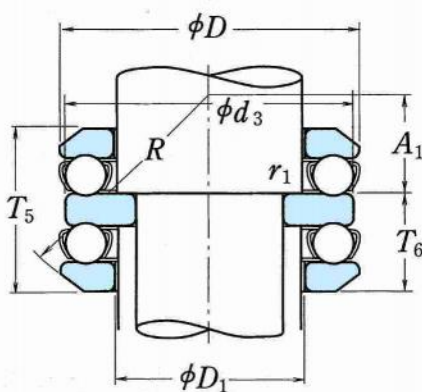

調心球面型

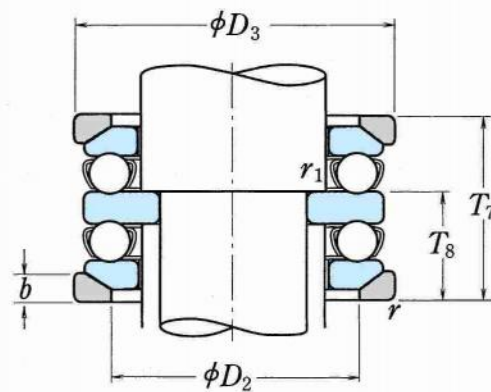

帶球面座圈


主要尺寸 (mm)								基本額定負荷 (N) [kgf]				極限轉速 (min ⁻¹)		代 號		
d_2	d	D	T_1	T_5	T_7	r (最小)	r_1 (最小)	C_a	C_{0a}	C_a	C_{0a}	脂潤滑	油潤滑	平面座型	調心球面型	帶球面座圈
10	15	32	22	24.6	28	0.6	0.3	16 700	24 800	1 710	2 530	4 800	7 100	52202	54202	54202 U
15	20	40	26	27.4	32	0.6	0.3	22 500	37 500	2 290	3 850	4 000	6 000	52204	54204	54204 U
	25	60	45	49.8	55	1	0.6	56 000	89 500	5 700	9 100	2 400	3 600	52405	54405	54405 U
20	25	47	28	31.4	36	0.6	0.3	28 000	50 500	2 860	5 150	3 400	5 300	52205	54205	54205 U
	25	52	34	37.6	42	1	0.3	36 000	61 500	3 650	6 250	3 000	4 500	52305	54305	54305 U
	30	70	52	56.2	62	1	0.6	73 000	126 000	7 450	12 800	2 200	3 200	52406	54406	54406 U
25	30	52	29	32.6	37	0.6	0.3	29 500	58 000	3 000	5 950	3 200	5 000	52206	54206	54206 U
	30	60	38	41.2	46	1	0.3	43 000	78 500	4 400	8 000	2 600	4 000	52306	54306	54306 U
	35	80	59	63	69	1.1	0.6	87 500	155 000	8 950	15 800	1 800	2 800	52407	54407	54407 U
30	35	62	34	37.8	42	1	0.3	39 500	78 000	4 050	7 950	2 800	4 300	52207	54207	54207 U
	35	68	44	47.2	52	1	0.3	56 000	105 000	5 700	10 700	2 400	3 600	52307	54307	54307 U
	40	68	36	38.6	44	1	0.6	47 500	98 500	4 850	10 000	2 600	3 800	52208	54208	54208 U
	40	78	49	54	59	1	0.6	70 000	135 000	7 100	13 700	2 000	3 000	52308	54308	54308 U
35	40	90	65	69.4	77	1.1	0.6	103 000	188 000	10 500	19 100	1 700	2 400	52408	54408	54408 U
	45	73	37	39.6	45	1	0.6	48 000	105 000	4 900	10 700	2 400	3 600	52209	54209	54209 U
	45	85	52	56.2	62	1	0.6	80 500	163 000	8 200	16 700	1 900	2 800	52309	54309	54309 U
	45	100	72	78.8	86	1.1	0.6	128 000	246 000	13 000	25 100	1 500	2 200	52409	54409	54409 U
40	50	78	39	42	47	1	0.6	49 000	111 000	5 000	11 400	2 400	3 400	52210	54210	54210 U
	50	95	58	64.6	70	1.1	0.6	97 500	202 000	9 950	20 600	1 700	2 600	52310	54310	54310 U
	50	110	78	83.2	92	1.5	0.6	147 000	288 000	15 000	29 400	1 400	2 000	52410	54410	54410 U
45	55	90	45	49.6	55	1	0.6	70 000	159 000	7 150	16 200	2 000	3 000	52211	54211	54211 U
	55	105	64	72.6	78	1.1	0.6	115 000	244 000	11 800	24 900	1 500	2 400	52311	54311	54311 U
	55	120	87	92	101	1.5	0.6	181 000	350 000	18 500	35 500	1 200	1 800	52411	54411	54411 U
50	60	95	46	50	56	1	0.6	71 500	169 000	7 300	17 200	1 900	3 000	52212	54212	54212 U
	60	110	64	70.6	78	1.1	0.6	119 000	263 000	12 100	26 800	1 500	2 200	52312	54312	54312 U
	60	130	93	99	107	1.5	0.6	202 000	395 000	20 600	40 500	1 100	1 700	52412	54412	54412 U
	65	140	101	109.4	119	2	1	234 000	495 000	23 800	50 500	1 000	1 600	52413	54413	54413 U
55	65	100	47	50.4	57	1	0.6	75 500	189 000	7 700	19 200	1 900	2 800	52213	54213	54213 U
	65	115	65	71.8	79	1.1	0.6	123 000	282 000	12 500	28 700	1 500	2 200	52313	54313	54313 U
	70	105	47	50.6	57	1	1	74 000	189 000	7 550	19 200	1 800	2 800	52214	54214	54214 U
	70	125	72	80.4	88	1.1	1	137 000	315 000	14 000	32 000	1 300	2 000	52314	54314	54314 U
	70	150	107	114.2	125	2	1	252 000	555 000	25 700	56 500	1 000	1 500	52414	54414	54414 U




慶順五金·軸承
WWW.CS1970.COM.TW

雙向推力滾珠軸承


內徑 60~130 mm

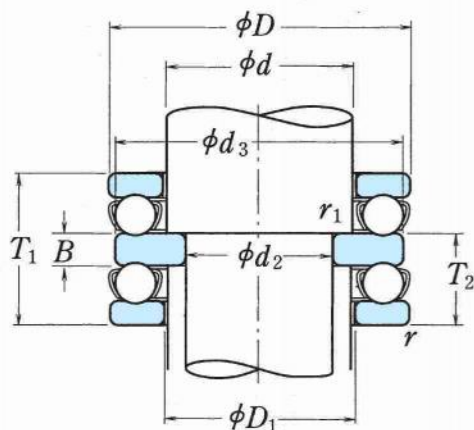

平面座型

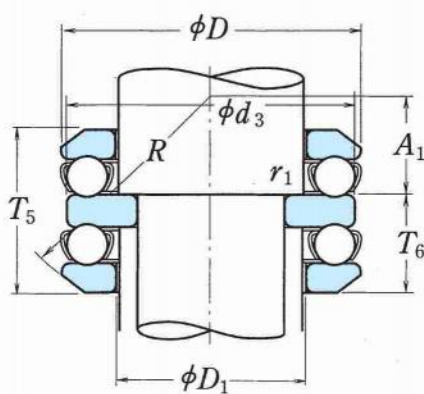

調心球面型

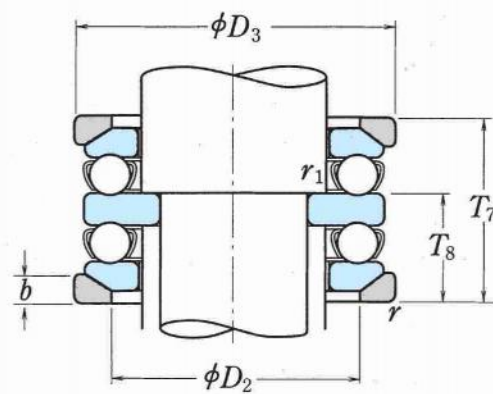

帶球面座圈

主要尺寸 (mm)								基本額定負荷 (N) [kgf]				極限轉速 (min ⁻¹)		代 號 ⁽¹⁾		
d_2	d	D	T_1	T_5	T_7	r (最小)	r_1 (最小)	C_a	C_{0a}	C_a	C_{0a}	脂潤滑	油潤滑	平面座型	調心球面型	帶球面座圈
60	75	110	47	49.6	57	1	1	78 000	209 000	7 950	21 300	1 800	2 600	52215	54215	54215 U
	75	135	79	87.2	95	1.5	1	159 000	365 000	16 200	37 500	1 200	1 800	52315	54315	54315 U
	75	160	115	123	135	2	1	254 000	560 000	25 900	57 000	900	1 400	52415	54415	54415 U
65	80	115	48	51	58	1	1	79 000	218 000	8 050	22 300	1 700	2 600	52216	54216	54216 U
	80	140	79	86.2	95	1.5	1	164 000	395 000	16 700	40 000	1 200	1 800	52316	54316	54316 U
	80	170	120	128.4	140	2.1	1	272 000	620 000	27 800	63 500	850	1 300	52416	54416	54416 U
	85	180	128	138	150	2.1	1.1	310 000	755 000	31 500	77 000	800	1 200	52417 X	54417 X	54417 XU
70	85	125	55	59.2	67	1	1	96 000	264 000	9 800	26 900	1 500	2 200	52217	54217	54217 U
	85	150	87	95.2	105	1.5	1	207 000	490 000	21 100	50 000	1 100	1 600	52317	54317	54317 U
	90	190	135	143.4	157	2.1	1.1	330 000	825 000	33 500	84 000	750	1 100	52418 X	54418 X	54418 XU
75	90	135	62	69	76	1.1	1	114 000	310 000	11 600	31 500	1 400	2 000	52218	54218	54218 U
	90	155	88	97.2	106	1.5	1	214 000	525 000	21 900	53 500	1 100	1 600	52318	54318	54318 U
80	100	210	150	160	176	3	1.1	370 000	985 000	38 000	100 000	670	1 000	52420 X	54420 X	54420 XU
	85	100	150	67	72.8	81	1.1	135 000	375 000	13 700	38 500	1 300	1 900	52220	54220	54220 U
85	100	170	97	105.4	115	1.5	1	239 000	595 000	24 300	61 000	950	1 500	52320	54320	54320 U
	90	110	230	166	—	3	1.1	415 000	1 150 000	42 000	118 000	600	900	52422 X	—	—
95	110	160	67	71.4	81	1.1	1	136 000	395 000	13 900	40 000	1 200	1 800	52222	54222	54222 U
	110	190	110	118.4	128	2	1	282 000	755 000	28 800	77 000	850	1 300	52322 X	54322 X	54322 XU
	120	250	177	—	—	4	1.5	515 000	1 540 000	52 500	157 000	560	850	52424 X	—	—
100	120	170	68	71.6	82	1.1	1.1	141 000	430 000	14 400	44 000	1 200	1 800	52224	54224	54224 U
	120	210	123	131.2	143	2.1	1.1	330 000	930 000	33 500	95 000	750	1 100	52324 X	54324 X	54324 XU
	130	270	192	—	—	4	1.5	525 000	1 590 000	53 500	162 000	530	800	52426 X	—	—
110	130	190	80	85.8	96	1.5	1.1	183 000	550 000	18 700	56 000	1 000	1 500	52226 X	54226 X	54226 XU
	130	225	130	—	—	2.1	1.1	350 000	1 030 000	35 500	105 000	710	1 100	52326 X	—	—
	140	280	196	—	—	4	1.5	550 000	1 750 000	56 500	178 000	500	750	52428 X	—	—
120	140	200	81	86.2	99	1.5	1.1	186 000	575 000	18 900	59 000	1 000	1 500	52228 X	54228 X	54228 XU
	140	240	140	—	—	2.1	1.1	370 000	1 130 000	37 500	115 000	670	1 000	52328 X	—	—
	150	300	209	—	—	4	2	620 000	2 010 000	63 000	205 000	480	710	52430 X	—	—
130	150	215	89	95.6	109	1.5	1.1	238 000	735 000	24 300	75 000	900	1 300	52230 X	54230 X	54230 XU
	150	250	140	—	—	2.1	1.1	380 000	1 200 000	39 000	123 000	630	950	52330 X	—	—
	160	320	226	—	—	5	2	650 000	2 210 000	66 000	226 000	430	630	52432 X	—	—


註 (1) 代號帶有 X 記號的軸承尺寸是其軸軌道輪外徑 d_3 小於軸承箱軌道盤外徑 D 的尺寸。




慶順五金·軸承
WWW.CS1970.COM.TW

雙向推力滾珠軸承


內徑 135~190 mm

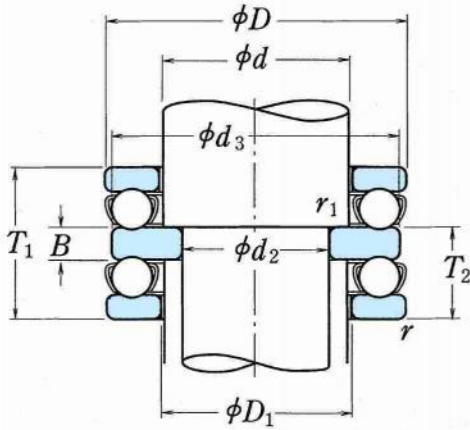

平面座型

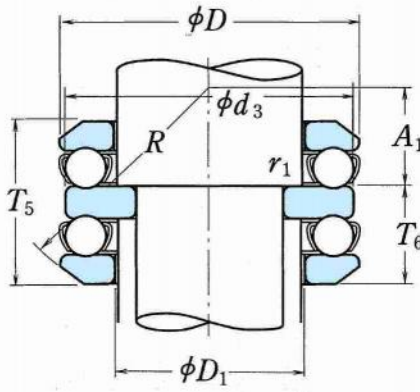

調心球面型

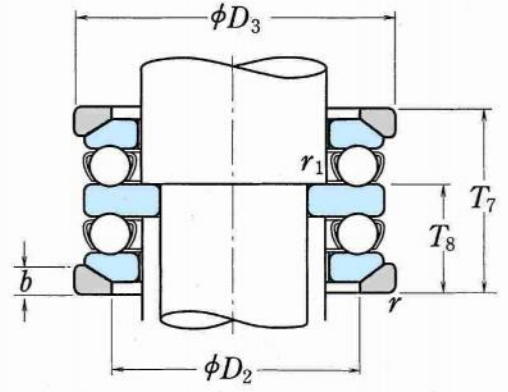

帶球面座圈

主要尺寸 (mm)								基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號 ⁽¹⁾		
d_2	d	D	T_1	T_5	T_7	r (最小)	r_1 (最小)	C_a	C_{0a}	C_a	C_{0a}	脂潤滑	油潤滑	平面座型	調心球面型	帶球面座圈
135	170	340	236	—	—	5	2.1	715 000	2 480 000	73 000	253 000	400	600	52434 X	—	—
140	160	225	90	97.4	110	1.5	1.1	249 000	805 000	25 400	82 000	850	1 300	52232 X	54232 X	54232 XU
	160	270	153	—	—	3	1.1	475 000	1 570 000	48 500	160 000	600	900	52332 X	—	—
	180	360	245	—	—	5	3	750 000	2 730 000	76 500	278 000	380	560	52436 X	—	—
150	170	240	97	104.4	117	1.5	1.1	280 000	915 000	28 500	93 000	800	1 200	52234 X	54234 X	54234 XU
	170	280	153	—	—	3	1.1	465 000	1 570 000	47 500	160 000	560	850	52334 X	—	—
	180	250	98	102.4	118	1.5	2	284 000	955 000	28 900	97 000	800	1 200	52236 X	54236 X	54236 XU
	180	300	165	—	—	3	3	480 000	1 680 000	49 000	171 000	530	800	52336 X	—	—
160	190	270	109	116.4	131	2	2	320 000	1 110 000	32 500	113 000	710	1 100	52238 X	54238 X	54238 XU
	190	320	183	—	—	4	2	550 000	1 960 000	56 000	199 000	480	710	52338 X	—	—
170	200	280	109	115.6	133	2	2	315 000	1 110 000	32 500	113 000	710	1 000	52240 X	54240 X	54240 XU
	200	340	192	—	—	4	2	600 000	2 220 000	61 500	227 000	450	670	52340 X	—	—
190	220	300	110	115.2	134	2	2	325 000	1 210 000	33 500	123 000	670	1 000	52244 X	54244 X	54244 XU

註 (1) 代號帶有 X 記號的軸承尺寸是其軸軌道輪外徑 d_3 小於軸承箱軌道盤外徑 D 的尺寸。



慶順五金·軸承
WWW.CS1970.COM.TW