



自動調心滾子軸承

內徑 20~55 mm

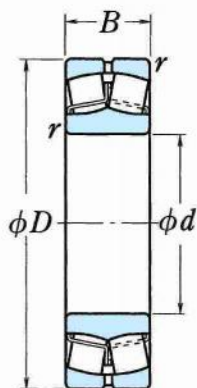

圓柱孔

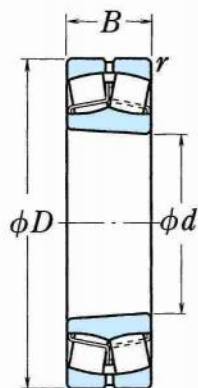

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min^{-1})		代號	
d	D	B	r (最小)	C_r	C_{0r}	C_r	C_{0r}	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
20	52	15	1.1	29 300	26 900	2 980	2 740	6 300	8 200	21304CDE4	21304CDKE4
25	52	18	1	37 500	37 000	3 850	3 800	7 100	9 000	22205CE4	22205CKE4
	62	17	1.1	43 000	40 500	4 350	4 150	5 300	6 700	21305CDE4	21305CDKE4
30	62	20	1	50 000	50 000	5 100	5 100	6 000	7 500	22206CE4	22206CKE4
	72	19	1.1	55 000	54 000	5 600	5 500	4 500	6 000	21306CDE4	21306CDKE4
35	72	23	1.1	69 000	71 000	7 050	7 200	5 300	6 700	22207CE4	22207CKE4
	80	21	1.5	71 500	76 000	7 250	7 750	4 000	5 300	21307CDE4	21307CDKE4
40	80	23	1.1	90 500	99 500	9 200	10 100	6 000	7 500	22208EAE4	22208EAKE4
	90	23	1.5	94 500	111 000	9 600	11 300	5 300	7 000	21308EAE4	21308EAKE4
	90	33	1.5	136 000	153 000	13 900	15 600	4 500	6 000	22308EAE4	22308EAKE4
45	85	23	1.1	94 500	111 000	9 600	11 300	5 300	7 000	22209EAE4	22209EAKE4
	100	25	1.5	119 000	144 000	12 100	14 600	4 500	5 600	21309EAE4	21309EAKE4
	100	36	1.5	166 000	195 000	16 900	19 900	4 000	5 300	22309EAE4	22309EAKE4
50	90	23	1.1	99 000	119 000	10 100	12 100	5 000	6 300	22210EAE4	22210EAKE4
	110	27	2	142 000	174 000	14 500	17 800	4 300	5 300	21310EAE4	21310EAKE4
	110	40	2	197 000	234 000	20 000	23 900	3 800	4 800	22310EAE4	22310EAKE4
55	100	25	1.5	119 000	144 000	12 100	14 600	4 500	5 600	22211EAE4	22211EAKE4
	120	29	2	142 000	174 000	14 500	17 800	4 300	5 300	21311EAE4	21311EAKE4
	120	43	2	234 000	292 000	23 800	29 800	3 400	4 300	22311EAE4	22311EAKE4

註 (1) 末尾帶有K字者是表示為錐形孔(錐度1:12)的軸承。


備註 1. EA型是以帶油孔、油槽為標準。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 60~85 mm

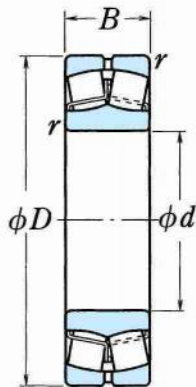

圓柱孔

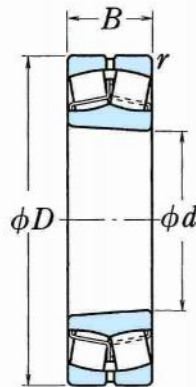

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min ⁻¹)		代號	
d	D	B	r (最小)	C _r	C _{0r}	[kgf]		脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
						C _r	C _{0r}				
60	95	26	1.1	98 500	141 000	10 000	14 400	3 600	4 500	23012CE4	23012CKE4
	110	28	1.5	142 000	174 000	14 500	17 800	4 300	5 300	22212EAE4	22212EAKE4
	130	31	2.1	190 000	244 000	19 400	24 900	3 400	4 300	21312EAE4	21312EAKE4
	130	46	2.1	271 000	340 000	27 600	35 000	3 200	4 000	22312EAE4	22312EAKE4
65	120	31	1.5	177 000	230 000	18 000	23 500	3 800	4 800	22213EAE4	22213EAKE4
	140	33	2.1	212 000	275 000	21 600	28 000	3 200	4 000	21313EAE4	21313EAKE4
	140	48	2.1	300 000	380 000	30 500	38 500	3 000	3 800	22313EAE4	22313EAKE4
70	125	31	1.5	180 000	232 000	18 300	23 600	3 600	4 500	22214EAE4	22214EAKE4
	150	35	2.1	250 000	325 000	25 400	33 500	3 000	3 800	21314EAE4	21314EAKE4
	150	51	2.1	340 000	435 000	34 500	44 000	2 800	3 400	22314EAE4	22314EAKE4
75	130	31	1.5	190 000	244 000	19 400	24 900	3 400	4 300	22215EAE4	22215EAKE4
	160	37	2.1	250 000	325 000	25 400	33 500	3 000	3 800	21315EAE4	21315EAKE4
	160	55	2.1	390 000	505 000	39 500	51 500	2 600	3 200	22315EAE4	22315EAKE4
80	140	33	2	212 000	275 000	21 600	28 000	3 200	4 000	22216EAE4	22216EAKE4
	170	39	2.1	284 000	375 000	29 000	38 000	2 800	3 600	21316EAE4	21316EAKE4
	170	58	2.1	435 000	565 000	44 000	58 000	2 400	3 000	22316EAE4	22316EAKE4
85	150	36	2	250 000	325 000	25 400	33 500	3 000	3 800	22217EAE4	22217EAKE4
	180	41	3	289 000	395 000	29 500	40 000	2 800	3 600	21317EAE4	21317EAKE4
	180	60	3	480 000	630 000	49 000	64 000	2 200	2 800	22317EAE4	22317EAKE4


註 (1) 末尾帶有K字者是表示為錐形孔(錐度1:12)的軸承。

備註 1. EA型是以帶油孔、油槽為標準。




自動調心滾子軸承

內徑 90~110 mm

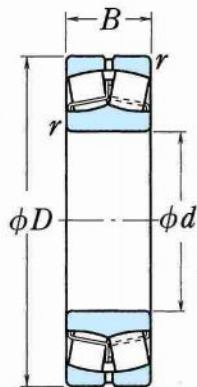

圓柱孔

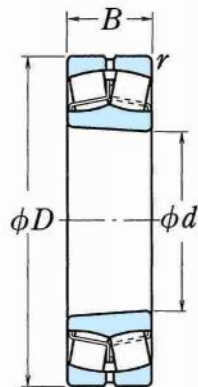

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min ⁻¹)		代號	
d	D	B	r (最小)	C _r	C _{0r}	[kgf]		脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
						C _r	C _{0r}				
90	160	40	2	289 000	395 000	29 500	40 000	2 800	3 600	22218EAE4	22218EAKE4
	160	52.4	2	340 000	490 000	34 500	50 000	1 800	2 400	23218CE4	23218CKE4
	190	43	3	330 000	450 000	33 500	46 000	2 600	3 400	21318EAE4	21318EAKE4
	190	64	3	535 000	705 000	54 500	72 000	2 200	2 600	22318EAE4	22318EAKE4
95	170	43	2.1	330 000	450 000	33 500	46 000	2 600	3 400	22219EAE4	22219EAKE4
	170	55.6	2.1	370 000	525 000	37 500	53 500	1 700	2 200	23219CAE4	23219CAKE4
	200	45	3	345 000	435 000	35 000	44 500	1 500	2 000	21319CE4	21319CKE4
	200	67	3	590 000	780 000	60 000	79 500	2 000	2 600	22319EAE4	22319EAKE4
100	150	37	1.5	212 000	335 000	21 600	34 500	2 200	2 800	23020CDE4	23020CDKE4
	150	50	1.5	276 000	470 000	28 100	48 000	1 800	2 400	24020CE4	24020CK30E4
	165	52	2	345 000	530 000	35 500	54 000	1 700	2 200	23120CE4	23120CKE4
	165	65	2	345 000	535 000	35 000	55 000	1 700	2 200	24120CAE4	24120CAK30E4
	180	46	2.1	365 000	490 000	37 000	50 000	2 400	3 200	22220EAE4	22220EAKE4
	180	60.3	2.1	420 000	605 000	42 500	61 500	1 600	2 200	23220CE4	23220CKE4
215	47	3	395 000	485 000	40 500	49 500	1 400	1 900	21320CE4	21320CKE4	
	73	3	690 000	930 000	70 500	94 500	1 900	2 400	22320EAE4	22320EAKE4	
110	170	45	2	293 000	465 000	29 900	47 500	2 000	2 400	23022CDE4	23022CDKE4
	170	60	2	380 000	645 000	38 500	66 000	1 600	2 200	24022CE4	24022CK30E4
	180	56	2	385 000	630 000	39 500	64 000	1 600	2 000	23122CE4	23122CKE4
180	69	2	460 000	750 000	47 000	76 500	1 600	2 000	24122CE4	24122CK30E4	
	200	53	2.1	485 000	645 000	49 500	66 000	2 200	2 800	22222EAE4	22222EAKE4
	200	69.8	2.1	515 000	760 000	52 500	77 500	1 500	1 900	23222CE4	23222CKE4
240	50	3	450 000	545 000	46 000	55 500	1 300	1 700	21322CAE4	21322CAKE4	
	80	3	825 000	1 120 000	84 000	115 000	1 700	2 200	22322EAE4	22322EAKE4	

註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。


備註 1. EA型是以帶油孔、油槽為標準。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 120~150 mm

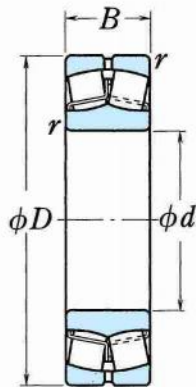

圓柱孔

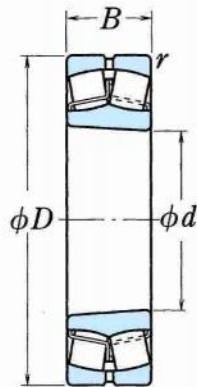

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代號	
d	D	B	r (最小)	C _r	C _{0r}	C _r	C _{0r}	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
120	180	46	2	315 000	525 000	32 000	53 500	1 800	2 200	23024CDE4	23024CDKE4
	180	60	2	395 000	705 000	40 500	72 000	1 500	2 000	24024CE4	24024CK30E4
	200	62	2	465 000	720 000	47 500	73 500	1 400	1 800	23124CE4	23124CKE4
	200	80	2	575 000	950 000	58 500	96 500	1 400	1 800	24124CE4	24124CK30E4
	215	58	2.1	550 000	765 000	56 000	78 000	2 000	2 600	22224EAE4	22224EAKE4
	215	76	2.1	630 000	970 000	64 500	99 000	1 300	1 700	23224CE4	23224CKE4
	260	86	3	955 000	1 320 000	97 000	134 000	1 600	2 000	22324EAE4	22324EAKE4
130	200	52	2	400 000	655 000	40 500	67 000	1 700	2 000	23026CDE4	23026CDKE4
	200	69	2	495 000	865 000	50 500	88 000	1 400	1 800	24026CE4	24026CK30E4
	210	64	2	505 000	825 000	51 500	84 500	1 300	1 700	23126CE4	23126CKE4
	210	80	2	590 000	1 010 000	60 000	103 000	1 300	1 700	24126CE4	24126CK30E4
	230	64	3	655 000	940 000	67 000	96 000	1 900	2 400	22226EAE4	22226EAKE4
	230	80	3	700 000	1 080 000	71 500	110 000	1 200	1 600	23226CE4	23226CKE4
	280	93	4	995 000	1 350 000	101 000	137 000	1 300	1 600	22326CE4	22326CKE4
140	210	53	2	420 000	715 000	43 000	73 000	1 600	1 900	23028CDE4	23028CDKE4
	210	69	2	525 000	945 000	53 500	96 500	1 300	1 700	24028CE4	24028CK30E4
	225	68	2.1	580 000	945 000	59 000	96 500	1 200	1 600	23128CE4	23128CKE4
	225	85	2.1	670 000	1 160 000	68 500	118 000	1 200	1 600	24128CE4	24128CK30E4
	250	68	3	645 000	930 000	65 500	95 000	1 400	1 700	22228CDE4	22228CDKE4
	250	88	3	835 000	1 300 000	85 000	133 000	1 100	1 500	23228CE4	23228CKE4
	300	102	4	1 160 000	1 590 000	118 000	162 000	1 200	1 500	22328CE4	22328CKE4
150	225	56	2.1	470 000	815 000	48 000	83 000	1 400	1 800	23030CDE4	23030CDKE4
	225	75	2.1	590 000	1 090 000	60 500	111 000	1 200	1 500	24030CE4	24030CK30E4
	250	80	2.1	725 000	1 180 000	74 000	121 000	1 100	1 400	23130CE4	23130CKE4
	250	100	2.1	890 000	1 530 000	91 000	156 000	1 100	1 400	24130CE4	24130CK30E4
	270	73	3	765 000	1 120 000	78 000	114 000	1 300	1 600	22230CDE4	22230CDKE4
	270	96	3	975 000	1 560 000	99 500	159 000	1 100	1 400	23230CE4	23230CKE4
	320	108	4	1 220 000	1 690 000	125 000	172 000	1 100	1 400	22330CAE4	22330CAKE4

註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。


備註 1. EA型是以帶油孔、油槽為標準。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 160~190 mm

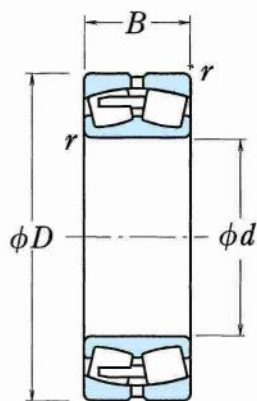

圓柱孔

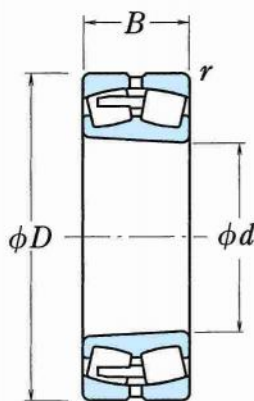

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N) [kgf]				極限轉速 (min ⁻¹)		代號	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> (最小)	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
160	220	45	2	360 000	675 000	37 000	69 000	1 400	1 800	23932CAE4	23932CAKE4
	240	60	2.1	540 000	955 000	55 000	97 500	1 300	1 700	23032CDE4	23032CDKE4
	240	80	2.1	680 000	1 260 000	69 000	128 000	1 100	1 400	24032CE4	24032CK30E4
	270	86	2.1	855 000	1 400 000	87 000	143 000	1 000	1 300	23132CE4	23132CKE4
	270	109	2.1	1 040 000	1 760 000	106 000	179 000	1 000	1 300	24132CE4	24132CK30E4
	290	80	3	910 000	1 320 000	93 000	135 000	1 200	1 500	22232CDE4	22232CDKE4
	290	104	3	1 100 000	1 770 000	112 000	180 000	1 000	1 300	23232CE4	23232CKE4
	340	114	4	1 360 000	1 900 000	139 000	193 000	1 100	1 300	22332CAE4	22332CAKE4
170	230	45	2	350 000	660 000	35 500	67 500	1 400	1 800	23934BCAE4	23934BCAKE4
	260	67	2.1	640 000	1 090 000	65 000	112 000	1 200	1 600	23034CDE4	23034CDKE4
	260	90	2.1	825 000	1 520 000	84 000	155 000	1 000	1 300	24034CE4	24034CK30E4
	280	88	2.1	940 000	1 570 000	96 000	160 000	1 000	1 300	23134CE4	23134CKE4
	280	109	2.1	1 080 000	1 860 000	110 000	190 000	1 000	1 300	24134CE4	24134CK30E4
	310	86	4	990 000	1 500 000	101 000	153 000	1 100	1 400	22234CDE4	22234CDKE4
	310	110	4	1 200 000	1 910 000	122 000	195 000	900	1 200	23234CE4	23234CKE4
	360	120	4	1 580 000	2 110 000	161 000	215 000	1 000	1 200	22334CAE4	22334CAKE4
180	250	52	2	470 000	890 000	48 000	90 500	1 200	1 600	23936CAE4	23936CAKE4
	280	74	2.1	750 000	1 270 000	76 000	129 000	1 200	1 400	23036CDE4	23036CDKE4
	280	100	2.1	965 000	1 750 000	98 500	178 000	950	1 200	24036CE4	24036CK30E4
	300	96	3	1 050 000	1 760 000	108 000	180 000	900	1 200	23136CE4	23136CKE4
	300	118	3	1 190 000	2 040 000	121 000	208 000	900	1 200	24136CE4	24136CK30E4
	320	86	4	1 020 000	1 540 000	104 000	157 000	1 100	1 300	22236CDE4	22236CDKE4
	320	112	4	1 300 000	2 110 000	133 000	215 000	850	1 100	23236CE4	23236CKE4
	380	126	4	1 740 000	2 340 000	177 000	238 000	950	1 200	22336CAE4	22336CAKE4
190	260	52	2	460 000	875 000	47 000	89 500	1 200	1 500	23938CAE4	23938CAKE4
	290	75	2.1	775 000	1 350 000	79 000	138 000	1 100	1 400	23038CAE4	23038CAKE4
	290	100	2.1	975 000	1 840 000	99 500	188 000	900	1 200	24038CE4	24038CK30E4
	320	104	3	1 190 000	2 020 000	121 000	206 000	850	1 100	23138CE4	23138CKE4
	320	128	3	1 370 000	2 330 000	140 000	238 000	850	1 100	24138CE4	24138CK30E4
	340	92	4	1 140 000	1 730 000	116 000	176 000	1 000	1 200	22238CAE4	22238CAKE4
	340	120	4	1 440 000	2 350 000	147 000	240 000	800	1 100	23238CE4	23238CKE4
	400	132	5	1 890 000	2 590 000	193 000	264 000	900	1 100	22338CAE4	22338CAKE4


註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 200~260 mm

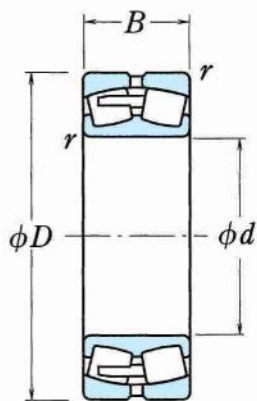

圓柱孔

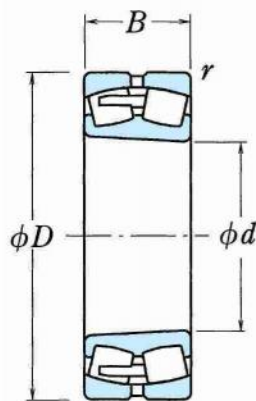

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min^{-1})		代號	
d	D	B	r (最小)	C_r	C_{0r}	C_r	C_{0r}	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
200	280	60	2.1	570 000	1 060 000	58 000	108 000	1 100	1 400	23940CAE4	23940CAKE4
	310	82	2.1	940 000	1 700 000	96 000	174 000	1 000	1 300	23040CAE4	23040CAKE4
	310	109	2.1	1 140 000	2 120 000	116 000	216 000	850	1 100	24040CE4	24040CK30E4
	340	112	3	1 360 000	2 330 000	139 000	238 000	800	1 000	23140CE4	23140CKE4
	340	140	3	1 570 000	2 670 000	160 000	272 000	800	1 000	24140CE4	24140CK30E4
	360	98	4	1 300 000	2 010 000	133 000	204 000	950	1 200	22240CAE4	22240CAKE4
	360	128	4	1 660 000	2 750 000	169 000	281 000	750	1 000	23240CE4	23240CKE4
	420	138	5	2 000 000	2 990 000	204 000	305 000	850	1 000	22340CAE4	22340CAKE4
220	300	60	2.1	625 000	1 240 000	64 000	126 000	1 000	1 300	23944CAE4	23944CAKE4
	340	90	3	1 090 000	1 980 000	111 000	202 000	950	1 200	23044CAE4	23044CAKE4
	340	118	3	1 360 000	2 600 000	138 000	265 000	750	1 000	24044CE4	24044CK30E4
	370	120	4	1 570 000	2 710 000	160 000	276 000	710	950	23144CE4	23144CKE4
	370	150	4	1 800 000	3 200 000	183 000	325 000	710	950	24144CE4	24144CK30E4
	400	108	4	1 570 000	2 430 000	160 000	247 000	850	1 000	22244CAE4	22244CAKE4
	400	144	4	2 020 000	3 400 000	206 000	350 000	670	900	23244CE4	23244CKE4
	460	145	5	2 350 000	3 400 000	240 000	345 000	750	950	22344CAE4	22344CAKE4
240	320	60	2.1	635 000	1 300 000	65 000	133 000	950	1 200	23948CAE4	23948CAKE4
	360	92	3	1 160 000	2 140 000	118 000	218 000	850	1 100	23048CAE4	23048CAKE4
	360	118	3	1 390 000	2 730 000	141 000	278 000	710	950	24048CE4	24048CK30E4
	400	128	4	1 790 000	3 100 000	182 000	320 000	670	850	23148CE4	23148CKE4
	400	160	4	2 130 000	3 800 000	217 000	385 000	670	850	24148CE4	24148CK30E4
	440	120	4	1 870 000	2 890 000	191 000	294 000	750	950	22248CAE4	22248CAKE4
	440	160	4	2 440 000	4 050 000	249 000	415 000	630	800	23248CAE4	23248CAKE4
	500	155	5	2 600 000	3 800 000	265 000	385 000	670	850	22348CAE4	22348CAKE4
260	360	75	2.1	930 000	1 870 000	95 000	191 000	850	1 000	23952CAE4	23952CAKE4
	400	104	4	1 430 000	2 580 000	145 000	263 000	800	950	23052CAE4	23052CAKE4
	400	140	4	1 810 000	3 500 000	185 000	360 000	630	850	24052CAE4	24052CAK30E4
	440	144	4	2 160 000	3 750 000	221 000	385 000	600	800	23152CAE4	23152CAKE4
	440	180	4	2 560 000	4 700 000	261 000	480 000	600	800	24152CAE4	24152CAK30E4
	480	130	5	2 180 000	3 400 000	222 000	345 000	670	850	22252CAE4	22252CAKE4
	480	174	5	2 740 000	4 550 000	279 000	460 000	560	750	23252CAE4	23252CAKE4
	540	165	6	3 100 000	4 600 000	320 000	470 000	630	800	22352CAE4	22352CAKE4


註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 280~340 mm

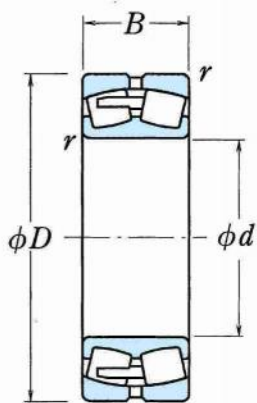

圓柱孔

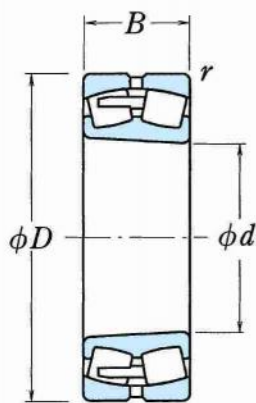

錐形孔



無油孔、油槽


主要尺寸 (mm)				基本額定負荷 (N) [kgf]				極限轉速 (min ⁻¹)		代號		
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> (最小)	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾	
280	380	75	2.1	925 000	1 950 000	94 500	199 000	800	950	23956CAE4	23956CAKE4	
	420	106	4	1 540 000	2 950 000	157 000	300 000	710	900	23056CAE4	23056CAKE4	
	420	140	4	1 880 000	3 800 000	191 000	385 000	600	800	24056CAE4	24056CAK30E4	
	460	146	5	2 230 000	4 000 000	228 000	410 000	560	750	23156CAE4	23156CAKE4	
	460	180	5	2 640 000	5 000 000	269 000	505 000	560	750	24156CAE4	24156CAK30E4	
	500	130	5	2 280 000	3 650 000	233 000	370 000	630	800	22256CAE4	22256CAKE4	
	500	176	5	2 880 000	4 900 000	294 000	500 000	530	670	23256CAE4	23256CAKE4	
	580	175	6	3 500 000	5 150 000	355 000	525 000	560	710	22356CAE4	22356CAKE4	
	300	420	90	3	1 230 000	2 490 000	125 000	254 000	710	900	23960CAE4	23960CAKE4
		460	118	4	1 920 000	3 700 000	196 000	375 000	670	850	23060CAE4	23060CAKE4
460		160	4	2 310 000	4 600 000	235 000	470 000	530	710	24060CAE4	24060CAK30E4	
500		160	5	2 670 000	4 800 000	273 000	490 000	500	670	23160CAE4	23160CAKE4	
500		200	5	3 100 000	5 800 000	315 000	595 000	500	670	24160CAE4	24160CAK30E4	
540		140	5	2 610 000	4 250 000	266 000	430 000	600	750	22260CAE4	22260CAKE4	
540		192	5	3 400 000	5 900 000	350 000	600 000	480	630	23260CAE4	23260CAKE4	
320		440	90	3	1 300 000	2 750 000	132 000	281 000	670	850	23964CAE4	23964CAKE4
	480	121	4	1 960 000	3 850 000	200 000	395 000	630	800	23064CAE4	23064CAKE4	
	480	160	4	2 440 000	5 050 000	249 000	515 000	500	670	24064CAE4	24064CAK30E4	
	540	176	5	3 050 000	5 500 000	315 000	560 000	480	600	23164CAE4	23164CAKE4	
	540	218	5	3 550 000	6 650 000	360 000	675 000	480	600	24164CAE4	24164CAK30E4	
	580	150	5	2 990 000	4 850 000	305 000	495 000	530	670	22264CAE4	22264CAKE4	
	580	208	5	3 900 000	6 900 000	395 000	700 000	450	600	23264CAE4	23264CAKE4	
	340	460	90	3	1 330 000	2 840 000	136 000	289 000	630	800	23968CAE4	23968CAKE4
520		133	5	2 280 000	4 400 000	232 000	445 000	560	710	23068CAE4	23068CAKE4	
520		180	5	2 920 000	6 050 000	298 000	615 000	480	600	24068CAE4	24068CAK30E4	
580		190	5	3 600 000	6 600 000	370 000	670 000	430	560	23168CAE4	23168CAKE4	
580		243	5	4 250 000	7 900 000	430 000	810 000	430	560	24168CAE4	24168CAK30E4	
620		224	6	4 400 000	7 800 000	450 000	795 000	400	530	23268CAE4	23268CAKE4	

註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。




自動調心滾子軸承

內徑 360~440 mm

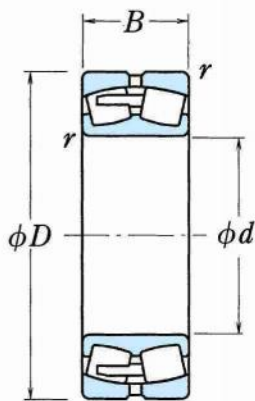

圓柱孔

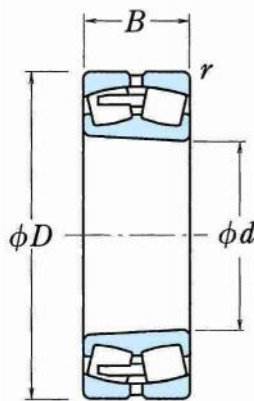

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min ⁻¹)		代號	
d	D	B	r (最小)	C _r	C _{0r}	C _r	C _{0r}	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
								360	480	90	3
	540	134	5	2 390 000	4 700 000	244 000	480 000	530	670	23072CAE4	23072CAKE4
	540	180	5	2 930 000	6 100 000	299 000	625 000	450	600	24072CAE4	24072CAK30E4
	600	192	5	3 800 000	7 100 000	390 000	725 000	400	530	23172CAE4	23172CAKE4
	600	243	5	4 200 000	8 000 000	430 000	815 000	400	530	24172CAE4	24172CAK30E4
	650	232	6	4 800 000	8 550 000	490 000	870 000	380	500	23272CAE4	23272CAKE4
380	520	106	4	1 870 000	4 100 000	190 000	420 000	530	670	23976CAE4	23976CAKE4
	560	135	5	2 500 000	5 100 000	255 000	520 000	530	630	23076CAE4	23076CAKE4
	560	180	5	3 050 000	6 600 000	315 000	670 000	430	560	24076CAE4	24076CAK30E4
	620	194	5	4 000 000	7 600 000	405 000	775 000	400	500	23176CAE4	23176CAKE4
	620	243	5	4 350 000	8 450 000	440 000	865 000	400	500	24176CAE4	24176CAK30E4
	680	240	6	5 150 000	9 200 000	525 000	940 000	360	480	23276CAE4	23276CAKE4
400	540	106	4	1 890 000	4 250 000	193 000	435 000	530	630	23980CAE4	23980CAKE4
	600	148	5	2 970 000	5 900 000	305 000	605 000	480	600	23080CAE4	23080CAKE4
	600	200	5	3 600 000	7 600 000	370 000	775 000	400	500	24080CAE4	24080CAK30E4
	650	200	6	4 150 000	7 900 000	420 000	805 000	380	480	23180CAE4	23180CAKE4
	650	250	6	4 950 000	10 100 000	505 000	1 030 000	380	480	24180CAE4	24180CAK30E4
	720	256	6	5 800 000	10 400 000	590 000	1 060 000	340	450	23280CAE4	23280CAKE4
420	560	106	4	1 870 000	4 250 000	191 000	430 000	500	600	23984CAE4	23984CAKE4
	620	150	5	2 910 000	5 850 000	297 000	595 000	450	560	23084CAE4	23084CAKE4
	620	200	5	3 750 000	8 100 000	380 000	825 000	380	480	24084CAE4	24084CAK30E4
	700	224	6	5 000 000	9 400 000	510 000	960 000	340	450	23184CAE4	23184CAKE4
	700	280	6	6 000 000	12 000 000	610 000	1 220 000	340	450	24184CAE4	24184CAK30E4
	760	272	7.5	6 450 000	11 700 000	660 000	1 190 000	320	430	23284CAE4	23284CAKE4
440	600	118	4	2 190 000	4 800 000	223 000	490 000	450	560	23988CAE4	23988CAKE4
	650	157	6	3 150 000	6 350 000	320 000	645 000	430	530	23088CAE4	23088CAKE4
	650	212	6	4 150 000	9 100 000	425 000	930 000	360	450	24088CAE4	24088CAK30E4
	720	226	6	5 300 000	10 300 000	540 000	1 060 000	320	430	23188CAE4	23188CAKE4
	720	280	6	6 000 000	12 100 000	610 000	1 230 000	320	430	24188CAE4	24188CAK30E4
	790	280	7.5	6 900 000	12 800 000	705 000	1 300 000	300	400	23288CAE4	23288CAKE4


註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 460~560 mm

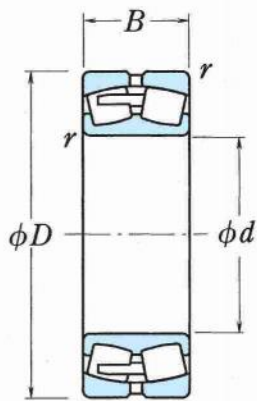

圓柱孔

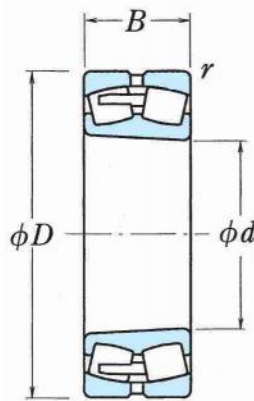

錐形孔



無油孔、油槽

主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代號	
d	D	B	r (最小)	C _r	C _{0r}	C _r	C _{0r}	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
460	620	118	4	2 220 000	4 950 000	227 000	505 000	430	530	23992CAE4	23992CAKE4
	680	163	6	3 450 000	7 100 000	355 000	725 000	400	500	23092CAE4	23092CAKE4
	680	218	6	4 500 000	9 950 000	460 000	1 010 000	340	430	24092CAE4	24092CAK30E4
	760	240	7.5	5 700 000	10 900 000	580 000	1 110 000	300	400	23192CAE4	23192CAKE4
	760	300	7.5	6 300 000	12 400 000	640 000	1 270 000	300	400	24192CAE4	24192CAK30E4
	830	296	7.5	7 350 000	13 700 000	750 000	1 400 000	280	380	23292CAE4	23292CAKE4
480	650	128	5	2 580 000	5 850 000	263 000	595 000	400	500	23996CAE4	23996CAKE4
	700	165	6	3 800 000	7 950 000	385 000	810 000	400	480	23096CAE4	23096CAKE4
	700	218	6	4 600 000	10 200 000	470 000	1 040 000	320	430	24096CAE4	24096CAK30E4
	790	248	7.5	6 050 000	11 700 000	620 000	1 200 000	300	380	23196CAE4	23196CAKE4
	790	308	7.5	7 150 000	14 600 000	730 000	1 490 000	300	380	24196CAE4	24196CAK30E4
	870	310	7.5	7 850 000	14 400 000	805 000	1 470 000	260	360	23296CAE4	23296CAKE4
500	670	128	5	2 460 000	5 550 000	250 000	565 000	400	500	239/500CAE4	239/500CAKE4
	720	167	6	3 750 000	8 100 000	385 000	825 000	380	480	230/500CAE4	230/500CAKE4
	720	218	6	4 450 000	9 900 000	450 000	1 010 000	300	400	240/500CAE4	240/500CAK30E4
	830	264	7.5	6 850 000	13 400 000	700 000	1 360 000	280	360	231/500CAE4	231/500CAKE4
	830	325	7.5	8 000 000	16 000 000	815 000	1 630 000	280	360	241/500CAE4	241/500CAK30E4
	920	336	7.5	9 000 000	16 600 000	915 000	1 690 000	260	320	232/500CAE4	232/500CAKE4
530	710	136	5	2 930 000	6 800 000	299 000	695 000	360	450	239/530CAE4	239/530CAKE4
	780	185	6	4 400 000	9 200 000	450 000	940 000	340	430	230/530CAE4	230/530CAKE4
	780	250	6	5 400 000	11 800 000	550 000	1 210 000	280	360	240/530CAE4	240/530CAK30E4
	870	272	7.5	7 150 000	14 100 000	730 000	1 440 000	260	340	231/530CAE4	231/530CAKE4
	870	335	7.5	8 500 000	17 500 000	870 000	1 790 000	260	340	241/530CAE4	241/530CAK30E4
	980	355	9.5	10 100 000	18 800 000	1 030 000	1 920 000	240	300	232/530CAE4	232/530CAKE4
560	750	140	5	3 100 000	7 250 000	320 000	740 000	340	430	239/560CAE4	239/560CAKE4
	820	195	6	5 000 000	10 700 000	510 000	1 090 000	320	400	230/560CAE4	230/560CAKE4
	820	258	6	5 950 000	13 300 000	605 000	1 360 000	260	340	240/560CAE4	240/560CAK30E4
	920	280	7.5	7 850 000	15 500 000	800 000	1 580 000	240	320	231/560CAE4	231/560CAKE4
	920	355	7.5	9 400 000	19 600 000	960 000	2 000 000	240	320	241/560CAE4	241/560CAK30E4
	1 030	365	9.5	10 900 000	20 500 000	1 110 000	2 090 000	220	280	232/560CAE4	232/560CAKE4


註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。



慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 600~800 mm

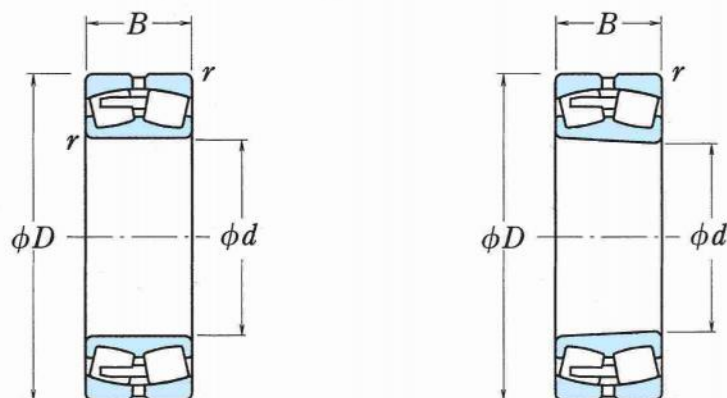

圓柱孔

錐形孔

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min ⁻¹)		代號		
d	D	B	r (最小)	C _r	C _{0r}	[kgf]		脂潤滑	油潤滑	圓柱孔	錐形孔(1)	
						C _r	C _{0r}					
600	800	150	5	3 450 000	8 100 000	350 000	830 000	320	400	239/600CAE4	239/600CAKE4	
	870	200	6	5 450 000	12 200 000	555 000	1 240 000	300	360	230/600CAE4	230/600CAKE4	
	870	272	6	6 600 000	15 100 000	675 000	1 540 000	240	320	240/600CAE4	240/600CAK30E4	
	980	300	7.5	8 750 000	17 500 000	895 000	1 790 000	220	280	231/600CAE4	231/600CAKE4	
	980	375	7.5	10 400 000	21 900 000	1 060 000	2 230 000	220	280	241/600CAE4	241/600CAK30E4	
	1 090	388	9.5	12 700 000	24 900 000	1 300 000	2 540 000	200	260	232/600CAE4	232/600CAKE4	
630	850	165	6	4 000 000	9 350 000	405 000	950 000	300	360	239/630CAE4	239/630CAKE4	
	920	212	7.5	5 900 000	12 700 000	600 000	1 300 000	280	340	230/630CAE4	230/630CAKE4	
	920	290	7.5	7 550 000	17 700 000	770 000	1 810 000	220	300	240/630CAE4	240/630CAK30E4	
	1 030	315	7.5	9 600 000	19 400 000	980 000	1 970 000	200	260	231/630CAE4	231/630CAKE4	
	1 030	400	7.5	11 300 000	23 900 000	1 160 000	2 440 000	200	260	241/630CAE4	241/630CAK30E4	
	1 150	412	12	13 400 000	25 600 000	1 370 000	2 610 000	180	240	232/630CAE4	232/630CAKE4	
670	900	170	6	4 350 000	10 300 000	445 000	1 050 000	260	340	239/670CAE4	239/670CAKE4	
	980	230	7.5	6 850 000	15 000 000	700 000	1 530 000	240	320	230/670CAE4	230/670CAKE4	
	980	308	7.5	8 450 000	19 500 000	860 000	1 990 000	200	260	240/670CAE4	240/670CAK30E4	
	1 090	336	7.5	10 600 000	21 600 000	1 080 000	2 200 000	190	240	231/670CAE4	231/670CAKE4	
	1 090	412	7.5	12 400 000	26 500 000	1 270 000	2 700 000	190	240	241/670CAE4	241/670CAK30E4	
	1 220	438	12	14 900 000	28 700 000	1 520 000	2 920 000	170	220	232/670CAE4	232/670CAKE4	
710	950	180	6	4 800 000	11 700 000	490 000	1 200 000	240	300	239/710CAE4	239/710CAKE4	
	1 030	236	7.5	7 100 000	15 800 000	725 000	1 610 000	240	280	230/710CAE4	230/710CAKE4	
	1 030	315	7.5	8 850 000	20 700 000	905 000	2 110 000	190	240	240/710CAE4	240/710CAK30E4	
	1 150	438	9.5	13 900 000	30 500 000	1 410 000	3 100 000	170	220	241/710CAE4	241/710CAK30E4	
	1 280	450	12	15 700 000	30 500 000	1 600 000	3 100 000	160	200	232/710CAE4	232/710CAKE4	
	750	1 000	185	6	5 250 000	12 800 000	535 000	1 310 000	220	280	239/750CAE4	239/750CAKE4
1 090		250	7.5	7 750 000	17 200 000	790 000	1 750 000	220	260	230/750CAE4	230/750CAKE4	
1 090		335	7.5	10 100 000	24 000 000	1 030 000	2 450 000	180	220	240/750CAE4	240/750CAK30E4	
1 360		475	15	17 700 000	35 500 000	1 800 000	3 600 000	140	190	232/750CAE4	232/750CAKE4	
800		1 060	195	6	5 600 000	13 700 000	570 000	1 400 000	220	260	239/800CAE4	239/800CAKE4
		1 150	258	7.5	8 350 000	19 100 000	850 000	1 950 000	200	240	230/800CAE4	230/800CAKE4
	1 150	345	7.5	10 900 000	26 300 000	1 110 000	2 680 000	160	200	240/800CAE4	240/800CAK30E4	
	1 280	375	9.5	13 800 000	29 200 000	1 410 000	2 970 000	150	190	231/800CAE4	231/800CAKE4	
	1 420	488	15	20 300 000	41 000 000	2 070 000	4 150 000	130	170	232/800CAE4	232/800CAKE4	


註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。




慶順五金·軸承
WWW.CS1970.COM.TW

自動調心滾子軸承

內徑 850~1400 mm

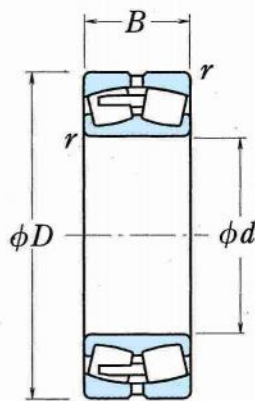

圓柱孔

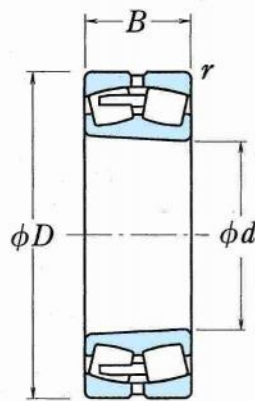

錐形孔

主要尺寸 (mm)				基本額定負荷 (N)				極限轉速 (min ⁻¹)		代號	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> (最小)	<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>	脂潤滑	油潤滑	圓柱孔	錐形孔 ⁽¹⁾
850	1 120	200	6	6 100 000	15 200 000	620 000	1 550 000	190	240	239/850CAE4	239/850CAKE4
	1 220	272	7.5	9 300 000	21 400 000	945 000	2 190 000	180	220	230/850CAE4	230/850CAKE4
	1 220	365	7.5	11 600 000	28 300 000	1 180 000	2 890 000	150	190	240/850CAE4	240/850CAK30E4
	1 500	515	15	22 300 000	45 500 000	2 270 000	4 650 000	120	160	232/850CAE4	232/850CAKE4
900	1 180	206	6	6 600 000	16 700 000	670 000	1 700 000	180	220	239/900CAE4	239/900CAKE4
	1 280	280	7.5	9 850 000	22 800 000	1 000 000	2 330 000	160	200	230/900CAE4	230/900CAKE4
	1 280	375	7.5	12 800 000	31 500 000	1 300 000	3 250 000	140	180	240/900CAE4	240/900CAK30E4
	1 580	515	15	23 400 000	47 500 000	2 380 000	4 850 000	110	140	232/900CAE4	232/900CAKE4
950	1 250	224	7.5	7 600 000	19 900 000	775 000	2 030 000	160	200	239/950CAE4	239/950CAKE4
	1 360	300	7.5	11 300 000	26 500 000	1 160 000	2 710 000	150	190	230/950CAE4	230/950CAKE4
	1 360	412	7.5	14 500 000	36 500 000	1 480 000	3 700 000	120	160	240/950CAE4	240/950CAK30E4
	1 660	530	15	24 700 000	50 500 000	2 520 000	5 150 000	100	130	232/950CAE4	232/950CAKE4
1 000	1 320	236	7.5	8 200 000	21 700 000	835 000	2 210 000	150	190	239/1000CAE4	239/1000CAKE4
	1 420	308	7.5	11 900 000	28 100 000	1 210 000	2 860 000	140	170	230/1000CAE4	230/1000CAKE4
	1 420	412	7.5	15 300 000	38 500 000	1 560 000	3 950 000	110	150	240/1000CAE4	240/1000CAK30E4
1 060	1 400	250	7.5	9 300 000	24 400 000	950 000	2 490 000	130	170	239/1060CAE4	239/1060CAKE4
	1 500	325	9.5	13 000 000	31 500 000	1 330 000	3 200 000	120	160	230/1060CAE4	230/1060CAKE4
	1 500	438	9.5	16 800 000	43 000 000	1 720 000	4 350 000	100	130	240/1060CAE4	240/1060CAK30E4
1 120	1 580	345	9.5	15 400 000	38 000 000	1 570 000	3 850 000	110	140	230/1120CAE4	230/1120CAKE4
	1 580	462	9.5	18 700 000	49 500 000	1 910 000	5 050 000	95	120	240/1120CAE4	240/1120CAK30E4
1 180	1 660	475	9.5	20 200 000	52 500 000	2 060 000	5 350 000	85	110	240/1180CAE4	240/1180CAK30E4
1 250	1 750	500	9.5	21 000 000	59 500 000	2 140 000	6 050 000	75	100	240/1250CAE4	240/1250CAK30E4
1 320	1 850	530	12	22 600 000	63 500 000	2 310 000	6 500 000	67	85	240/1320CAE4	240/1320CAK30E4
1 400	1 950	545	12	24 500 000	65 000 000	2 500 000	6 650 000	60	75	240/1400CAE4	240/1400CAK30E4

註 (1) 末尾帶有K或K30字者是表示為錐形孔(錐度1:12或1:30)的軸承。



慶順五金·軸承
WWW.CS1970.COM.TW