


# 單列圓錐滾子軸承

內徑 15~28 mm

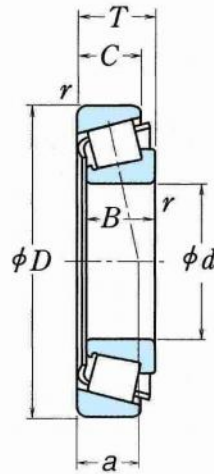

主要尺寸 (mm)					基本額定負荷 (N) {kgf}				極限轉速 (min <sup>-1</sup> )		代號		
d	D	T	B	C	內輪 外輪 r (最小)		C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>		脂潤滑	油潤滑
15	35	11.75	11	10	0.6	0.6	14 800	13 200	1 510	1 350	11 000	15 000	30202
	42	14.25	13	11	1	1	23 600	21 100	2 400	2 160	9 500	13 000	HR 30302 J
17	40	13.25	12	11	1	1	20 100	19 900	2 050	2 030	9 500	13 000	HR 30203 J
	40	17.25	16	14	1	1	27 100	28 000	2 770	2 860	9 500	13 000	HR 32203 J
	47	15.25	14	12	1	1	29 200	26 700	2 980	2 720	8 500	12 000	HR 30303 J
	47	15.25	14	10.5	1	1	22 000	20 300	2 240	2 070	8 000	11 000	30303 D
	47	20.25	19	16	1	1	37 500	36 500	3 800	3 750	8 500	11 000	HR 32303 J
20	42	15	15	12	0.6	0.6	24 600	27 400	2 510	2 800	9 000	12 000	HR 32004 XJ
	47	15.25	14	12	1	1	27 900	28 500	2 850	2 900	8 000	11 000	HR 30204 J
	47	15.25	14	12	0.3	1	23 900	24 000	2 430	2 450	8 000	11 000	HR 30204 C-A-
	47	19.25	18	15	1	1	35 500	37 500	3 650	3 850	8 500	11 000	HR 32204 J
	47	19.25	18	15	1	1	31 500	33 500	3 200	3 400	8 000	11 000	HR 32204 CJ
	52	16.25	15	13	1.5	1.5	35 000	33 500	3 550	3 400	7 500	10 000	HR 30304 J
	52	16.25	15	12	1.5	1.5	25 300	24 500	2 580	2 490	7 100	10 000	30304 D
	52	22.25	21	18	1.5	1.5	45 500	47 500	4 650	4 850	8 000	11 000	HR 32304 J
22	44	15	15	11.5	0.6	0.6	25 600	29 400	2 610	3 000	8 500	11 000	HR 320/22 XJ
	50	15.25	14	12	1	1	29 200	30 500	2 980	3 150	7 500	10 000	HR 302/22
	50	15.25	14	12	1	1	27 200	29 500	2 780	3 000	7 500	10 000	HR 302/22 C
	50	19.25	18	15	1	1	36 500	40 500	3 750	4 100	7 500	11 000	HR 322/22
	50	19.25	18	15	1	1	33 500	39 500	3 400	4 000	7 500	10 000	HR 322/22 C
	56	17.25	16	14	1.5	1.5	37 000	36 500	3 750	3 750	7 100	9 500	HR 303/22
	56	17.25	16	13	1.5	1.5	34 500	34 000	3 500	3 500	6 700	9 500	HR 303/22 C
	25	47	15	15	11.5	0.6	0.6	27 400	33 000	2 800	3 400	8 000	11 000
47		17	17	14	0.6	0.6	31 000	38 000	3 150	3 900	8 000	11 000	HR 33005 J
52		16.25	15	13	1	1	32 000	35 000	3 300	3 550	7 100	10 000	HR 30205 J
52		16.25	15	12	1	1	28 100	31 500	2 860	3 200	9 700	9 500	HR 30205 C
52		19.25	18	16	1	1	40 000	45 000	4 050	4 600	7 100	10 000	HR 32205 J
52		19.25	18	15	1	1	35 000	42 000	3 550	4 250	7 100	9 500	HR 32205 C
52		22	22	18	1	1	47 500	56 500	4 850	5 750	7 500	10 000	HR 33205 J
62		18.25	17	15	1.5	1.5	47 500	46 000	4 850	4 700	6 300	8 500	HR 30305 J
62		18.25	17	14	1.5	1.5	42 000	45 000	4 300	4 550	6 000	8 500	HR 30305 C
62		18.25	17	13	1.5	1.5	38 000	40 500	3 900	4 100	5 600	8 000	HR 30305 DJ
62		18.25	17	13	1.5	1.5	38 000	40 500	3 900	4 100	5 600	8 000	HR 31305 J
62		25.25	24	20	1.5	1.5	62 500	66 000	6 400	6 750	6 300	8 500	HR 32305 J
28	52	16	16	12	1	1	32 000	39 000	3 300	3 950	7 100	9 500	HR 320/28 XJ
	58	17.25	16	14	1	1	39 500	41 500	4 050	4 200	6 300	9 000	HR 302/28
	58	17.25	16	12	1	1	34 000	38 500	3 450	3 900	6 300	8 500	HR 302/28 C
	58	20.25	19	16	1	1	47 500	54 000	4 850	5 500	6 300	9 000	HR 322/28
	58	20.25	19	16	1	1	42 000	49 500	4 300	5 050	6 300	9 000	HR 322/28 CJ
	68	19.75	18	15	1.5	1.5	55 000	55 500	5 650	5 650	6 000	8 000	HR 303/28
	68	19.75	18	14	1.5	1.5	49 500	50 500	5 000	5 150	5 600	7 500	HR 303/28 C

備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計, 使用時請向提出諮詢。




慶順五金·軸承

WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 30~35 mm

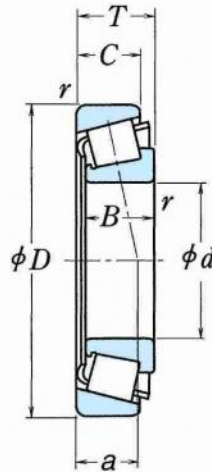

d	D	主要尺寸 (mm)			內輪 外輪 r (最小)		基本額定負荷 (N) [kgf]				極限轉速 (min <sup>-1</sup> )		代號
		T	B	C			C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑	
30	47	12	12	9	0.3	0.3	17 600	24 400	1 800	2 490	7 500	10 000	HR 32906 J
	55	17	17	13	1	1	36 000	44 500	3 700	4 550	6 700	9 000	HR 32006 XJ
	55	20	20	16	1	1	42 000	54 000	4 250	5 500	6 700	9 000	HR 33006 J
	62	17.25	16	14	1	1	43 000	47 500	4 400	4 850	6 000	8 000	HR 30206 J
	62	17.25	16	12	1	1	35 500	37 000	3 650	3 800	5 600	7 500	HR 30206 C
	62	21.25	20	17	1	1	52 000	60 000	5 300	6 150	6 000	8 500	HR 32206 J
	62	21.25	20	16	1	1	48 000	56 000	4 900	5 750	6 000	8 000	HR 32206 C
	62	25	25	19.5	1	1	66 500	79 500	6 800	8 100	6 000	8 000	HR 33206 J
	72	20.75	19	16	1.5	1.5	59 500	60 000	6 050	6 100	5 300	7 500	HR 30306 J
	72	20.75	19	14	1.5	1.5	56 500	55 500	5 800	5 650	5 300	7 100	HR 30306 C
	72	20.75	19	14	1.5	1.5	49 000	52 500	5 000	5 350	4 800	6 700	HR 30306 DJ
	72	20.75	19	14	1.5	1.5	49 000	52 500	5 000	5 350	4 800	6 800	HR 31306 J
	72	28.75	27	23	1.5	1.5	80 000	88 500	8 150	9 000	5 600	7 500	HR 32306 J
	72	28.75	27	23	1.5	1.5	76 000	86 500	7 750	8 800	5 600	7 500	HR 32306 CJ
32	58	17	17	13	1	1	37 500	47 000	3 800	4 800	6 300	8 500	HR 320/32 XJ
	58	21	20	16	1	1	41 000	50 000	4 150	5 100	6 300	8 500	330/32
	65	18.25	17	15	1	1	48 500	54 000	4 950	5 500	5 600	8 000	HR 302/32
	65	18.25	17	14	1	1	45 500	52 500	4 650	5 350	5 600	7 500	HR 302/32 C
	65	22.25	21	18	1	1	56 000	65 000	5 700	6 650	6 000	8 000	HR 322/32
	65	22.25	21	17	1	1	49 500	60 000	5 050	6 100	5 600	7 500	HR 322/32 C
	65	26	26	20.5	1	1	70 000	86 500	7 150	8 850	5 600	8 000	HR 332/32 J
	75	21.75	20	17	1.5	1.5	56 000	56 000	5 700	5 700	5 300	7 100	303/32
35	55	14	14	11.5	0.6	0.6	27 400	39 000	2 790	3 950	6 300	8 500	HR 32907 J
	62	18	18	14	1	1	43 500	55 500	4 400	5 650	5 600	8 000	HR 32007 XJ
	62	21	21	17	1	1	49 000	65 000	4 950	6 650	5 600	8 000	HR 33007 J
	72	18.25	17	15	1.5	1.5	54 000	59 500	5 500	6 050	5 300	7 100	HR 30207 J
	72	18.25	17	13	1.5	1.5	47 000	54 500	4 750	5 550	5 000	6 700	HR 30207 C
	72	24.25	23	19	1.5	1.5	70 500	83 500	7 150	8 550	5 300	7 100	HR 32207 J
	72	24.25	23	18	1.5	1.5	60 500	71 500	6 200	7 300	5 000	7 100	HR 32207 C
	72	28	28	22	1.5	1.5	86 500	108 000	8 850	11 100	5 300	7 100	HR 33207 J
	80	22.75	21	18	2	1.5	76 000	79 000	7 750	8 050	4 800	6 700	HR 30307 J
	80	22.75	21	16	2	1.5	68 000	70 500	6 900	7 200	4 800	6 300	HR 30307 C
	80	22.75	21	15	2	1.5	62 000	68 000	6 350	6 950	4 300	6 000	HR 30307 DJ
	80	22.75	21	15	2	1.5	62 000	68 000	6 350	6 950	4 300	6 000	HR 31307 J
	80	32.75	31	25	2	1.5	99 000	111 000	10 100	11 300	5 000	6 700	HR 32307 J


備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計, 使用時請提出諮詢。



慶順五金·軸承  
WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 40~50 mm

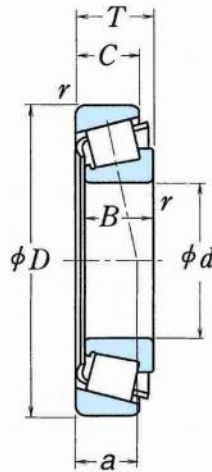

d	D	主要尺寸 (mm)			內輪 外輪 r (最小)		基本額定負荷 (N) {kgf}				極限轉速 (min <sup>-1</sup> )		代號
		T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
40	62	15	15	12	0.6	0.6	34 000	47 000	3 450	4 800	5 600	7 500	HR 32908 J
	68	19	19	14.5	1	1	53 000	71 000	5 400	7 250	5 300	7 100	HR 32008 XJ
	68	22	22	18	1	1	59 000	81 500	6 000	8 300	5 300	7 100	HR 33008 J
	75	26	26	20.5	1.5	1.5	78 500	101 000	8 000	10 300	4 800	6 700	HR 33108 J
	80	19.75	18	16	1.5	1.5	63 500	70 000	6 450	7 150	4 800	6 300	HR 30208 J
	80	24.75	23	19	1.5	1.5	77 000	90 500	7 900	9 200	4 800	6 300	HR 32208 J
	80	24.75	23	19	1.5	1.5	74 000	90 500	7 550	9 200	4 500	6 300	HR 32208 CJ
	80	32	32	25	1.5	1.5	107 000	137 000	10 900	14 000	4 800	6 300	HR 33208 J
	90	25.25	23	20	2	1.5	90 500	101 000	9 250	10 300	4 300	5 600	HR 30308 J
	90	25.25	23	18	2	1.5	84 500	93 500	8 600	9 500	4 300	5 600	HR 30308 C
	90	25.25	23	17	2	1.5	80 000	89 500	8 150	9 150	3 800	5 300	HR 30308 DJ
	90	25.25	23	17	2	1.5	80 000	89 500	8 150	9 150	3 800	5 300	HR 31308 J
90	35.25	33	27	2	1.5	120 000	145 000	12 200	14 800	4 300	6 000	HR 32308 J	
45	68	15	15	12	0.6	0.6	34 500	50 500	3 550	5 150	5 000	6 700	HR 32909 J
	75	20	20	15.5	1	1	60 000	83 000	6 150	8 450	4 500	6 300	HR 32009 XJ
	75	24	24	19	1	1	69 000	99 000	7 050	10 100	4 800	6 300	HR 33009 J
	80	26	26	20.5	1.5	1.5	84 000	113 000	8 550	11 600	4 500	6 000	HR 33109 J
	85	20.75	19	16	1.5	1.5	68 500	79 500	6 950	8 100	4 300	6 000	HR 30209 J
	85	24.75	23	19	1.5	1.5	83 000	102 000	8 500	10 400	4 300	6 000	HR 32209 J
	85	24.75	23	19	1.5	1.5	75 500	95 500	7 700	9 750	4 300	5 600	HR 32209 CJ
	85	32	32	25	1.5	1.5	111 000	147 000	11 300	15 000	4 300	6 000	HR 33209 J
	95	29	26.5	20	2.5	2.5	88 500	109 000	9 050	11 100	3 600	5 000	T 7 FC045
	95	36	35	30	2.5	2.5	139 000	174 000	14 200	17 800	4 000	5 300	T 2 ED045
	100	27.25	25	22	2	1.5	112 000	127 000	11 400	12 900	3 800	5 300	HR 30309 J
	100	27.25	25	18	2	1.5	95 500	109 000	9 750	11 100	3 400	4 800	HR 30309 DJ
100	27.25	25	18	2	1.5	95 500	109 000	9 750	11 100	3 400	4 800	HR 31309 J	
100	38.25	36	30	2	1.5	144 000	177 000	14 700	18 000	3 800	5 300	HR 32309 J	
50	30	36	35	30	2.5	2.5	144 000	185 000	14 600	18 800	3 800	5 000	T 2 ED050
	72	15	15	12	0.6	0.6	36 000	54 000	3 650	5 500	4 500	6 300	HR 32910 J
	80	20	20	15.5	1	1	61 000	87 000	6 250	8 900	4 300	6 000	HR 32010 XJ
	80	24	24	19	1	1	70 500	104 000	7 150	10 600	4 300	6 000	HR 33010 J
	85	26	26	20	1.5	1.5	89 000	126 000	9 100	12 800	4 300	5 600	HR 33110 J
	90	21.75	20	17	1.5	1.5	76 000	91 500	7 750	9 300	4 000	5 300	HR 30210 J
	90	24.75	23	19	1.5	1.5	87 500	109 000	8 900	11 100	4 000	5 300	HR 32210 J
	90	24.75	23	18	1.5	1.5	77 500	102 000	7 900	10 400	3 800	5 300	HR 32210 CJ
	90	32	32	24.5	1.5	1.5	118 000	165 000	12 100	16 800	4 000	5 300	HR 33210 J
	105	32	29	22	3	3	109 000	133 000	11 100	13 600	3 200	4 500	T 7 FC050
	110	29.25	27	23	2.5	2	130 000	148 000	13 300	15 100	3 400	4 800	HR 30310 J
	110	29.25	27	19	2.5	2	114 000	132 000	11 700	13 400	3 200	4 300	HR 30310 DJ
110	29.25	27	19	2.5	2	114 000	132 000	11 700	13 400	3 200	4 300	HR 31310 J	
110	42.25	40	33	2.5	2	176 000	220 000	17 900	22 400	3 600	4 800	HR 32310 J	
110	42.25	40	33	2.5	2	164 000	218 000	16 800	22 200	3 400	4 800	HR 32310 CJ	


備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計, 使用時請向提出諮詢。



慶順五金·軸承  
WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 55~65 mm

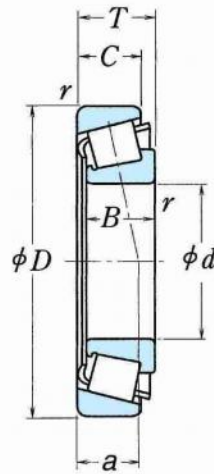

d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) [kgf]				極限轉速 (min <sup>-1</sup> )		代號
	D	T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
55	80	17	17	14	1	1	45 500	74 500	4 600	7 600	4 300	5 600	HR 32911 J
	90	23	23	17.5	1.5	1.5	81 500	117 000	8 300	11 900	3 800	5 300	HR 32011 XJ
	90	27	27	21	1.5	1.5	91 500	138 000	9 300	14 000	3 800	5 300	HR 33011 J
	95	30	30	23	1.5	1.5	112 000	158 000	11 500	16 100	3 800	5 000	HR 33111 J
	100	22.75	21	18	2	1.5	94 500	113 000	9 650	11 500	3 600	5 000	HR 30211 J
	100	26.75	25	21	2	1.5	110 000	137 000	11 200	14 000	3 600	5 000	HR 32211 J
	100	35	35	27	2	1.5	141 000	193 000	14 400	19 700	3 600	5 000	HR 33211 J
	115	34	31	23.5	3	3	126 000	164 000	12 800	16 700	3 000	4 300	T 7 FC055
	120	31.5	29	25	2.5	2	150 000	171 000	15 200	17 500	3 200	4 300	HR 30311 J
	120	31.5	29	21	2.5	2	131 000	153 000	13 400	15 600	2 800	4 000	HR 30311 DJ
	120	31.5	29	21	2.5	2	131 000	153 000	13 400	15 600	2 800	4 000	HR 31311 J
	120	45.5	43	35	2.5	2	204 000	258 000	20 800	26 300	3 200	4 300	HR 32311 J
	120	45.5	43	35	2.5	2	195 000	262 000	19 900	26 700	3 200	4 300	HR 32311 CJ
	60	85	17	17	14	1	1	49 000	84 500	5 000	8 650	3 800	5 300
95		23	23	17.5	1.5	1.5	85 500	127 000	8 700	12 900	3 600	5 000	HR 32012 XJ
95		27	27	21	1.5	1.5	96 000	150 000	9 800	15 300	3 600	5 000	HR 33012 J
100		30	30	23	1.5	1.5	115 000	166 000	11 700	16 900	3 400	4 800	HR 33112 J
110		23.75	22	19	2	1.5	104 000	123 000	10 600	12 500	3 400	4 500	HR 30212 J
110		29.75	28	24	2	1.5	131 000	167 000	13 400	17 000	3 400	4 500	HR 32212 J
110		38	38	29	2	1.5	166 000	231 000	16 900	23 600	3 400	4 500	HR 33212 J
125		37	33.5	26	3	3	151 000	197 000	15 400	20 100	2 800	3 800	T 7 FC060
130		33.5	31	26	3	2.5	174 000	201 000	17 700	20 500	3 000	4 000	HR 30312 J
130		33.5	31	22	3	2.5	151 000	177 000	15 400	18 100	2 600	3 800	HR 30312 DJ
130		33.5	31	22	3	2.5	151 000	177 000	15 400	18 100	2 600	3 800	HR 31312 J
130		48.5	46	37	3	2.5	233 000	295 000	23 700	30 000	3 000	4 000	HR 32312 J
130		48.5	46	35	3	2.5	196 000	249 000	20 000	25 400	2 800	3 800	32312 C
65		90	17	17	14	1	1	49 000	86 500	5 000	8 800	3 600	5 000
	100	23	23	17.5	1.5	1.5	86 500	132 000	8 800	13 500	3 400	4 500	HR 32013 XJ
	100	27	27	21	1.5	1.5	97 500	156 000	9 950	15 900	3 400	4 500	HR 33013 J
	110	34	34	26.5	1.5	1.5	148 000	218 000	15 100	22 200	3 200	4 300	HR 33113 J
	120	24.75	23	20	2	1.5	122 000	151 000	12 500	15 400	3 000	4 000	HR 30213 J
	120	32.75	31	27	2	1.5	157 000	202 000	16 000	20 600	3 000	4 000	HR 32213 J
	120	41	41	32	2	1.5	202 000	282 000	20 600	28 800	3 000	4 000	HR 33213 J
	140	36	33	28	3	2.5	200 000	233 000	20 400	23 800	2 600	3 600	HR 30313 J
	140	36	33	23	3	2.5	173 000	205 000	17 700	20 900	2 400	3 400	HR 30313 DJ
	140	36	33	23	3	2.5	173 000	205 000	17 700	20 900	2 400	3 400	HR 31313 J
	140	51	48	39	3	2.5	267 000	340 000	27 300	35 000	2 800	3 800	HR 32313 J


備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計, 使用時請提出諮詢。



慶順五金·軸承  
WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 70~80 mm

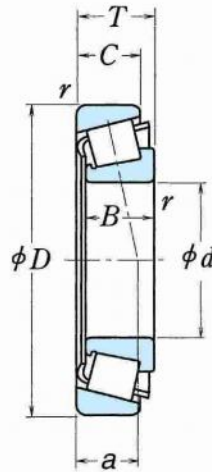

d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) {kgf}				極限轉速 (min <sup>-1</sup> )		代號
	D	T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
70	100	20	20	16	1	1	70 000	113 000	7 150	11 500	3 200	4 500	HR 32914 J
	110	25	25	19	1.5	1.5	104 000	158 000	10 600	16 100	3 200	4 300	HR 32014 XJ
	110	31	31	25.5	1.5	1.5	127 000	204 000	12 900	20 800	3 000	4 300	HR 33014 J
	120	37	37	29	2	1.5	177 000	262 000	18 100	26 700	3 000	4 000	HR 33114 J
	125	26.25	24	21	2	1.5	132 000	163 000	13 500	16 700	2 800	4 000	HR 30214 J
	125	33.25	31	27	2	1.5	157 000	205 000	16 100	20 900	2 800	4 000	HR 32214 J
	125	41	41	32	2	1.5	209 000	299 000	21 300	30 500	2 800	4 000	HR 33214 J
	140	39	35.5	27	3	3	177 000	229 000	18 000	23 400	2 400	3 400	T 7 FC070
	150	38	35	30	3	2.5	227 000	268 000	23 200	27 400	2 400	3 400	HR 30314 J
	150	38	35	25	3	2.5	192 000	229 000	19 600	23 300	2 200	3 200	HR 30314 DJ
	150	38	35	25	3	2.5	192 000	229 000	19 600	23 300	2 200	3 200	HR 31314 J
	150	54	51	42	3	2.5	300 000	390 000	30 500	39 500	2 600	3 400	HR 32314 J
	150	54	51	42	3	2.5	280 000	390 000	28 600	39 500	2 400	3 400	HR 32314 CJ
	75	105	20	20	16	1	1	72 500	120 000	7 400	12 300	3 200	4 300
115		25	25	19	1.5	1.5	109 000	171 000	11 100	17 400	3 000	4 000	HR 32015 XJ
115		31	31	25.5	1.5	1.5	133 000	220 000	13 500	22 500	3 000	4 000	HR 33015 J
125		37	37	29	2	2	182 000	275 000	18 600	28 100	2 800	3 800	HR 33115 J
130		27.25	25	22	2	1.5	143 000	182 000	14 600	18 500	2 800	3 800	HR 30215 J
130		33.25	31	27	2	1.5	165 000	219 000	16 900	22 400	2 800	3 800	HR 32215 J
130		41	41	31	2	1.5	215 000	315 000	21 900	32 000	2 800	3 800	HR 33215 J
160		40	37	31	3	2.5	253 000	300 000	25 800	30 500	2 400	3 200	HR 30315 J
160		40	37	26	3	2.5	211 000	251 000	21 500	25 600	2 200	3 000	HR 30315 DJ
160		40	37	26	3	2.5	211 000	251 000	21 500	25 600	2 200	3 000	HR 31315 J
160		58	55	45	3	2.5	340 000	445 000	35 000	45 500	2 400	3 200	HR 32315 J
160	58	55	43	3	2.5	310 000	420 000	32 000	43 000	2 200	3 200	32315 CA	
80	110	20	20	16	1	1	75 000	128 000	7 650	13 100	3 000	4 000	HR 32916 J
	125	29	29	22	1.5	1.5	140 000	222 000	14 300	22 700	2 800	3 600	HR 32016 XJ
	125	36	36	29.5	1.5	1.5	172 000	282 000	17 500	28 800	2 800	3 600	HR 33016 J
	130	37	37	29	2	1.5	186 000	289 000	19 000	29 400	2 600	3 600	HR 33116 J
	140	28.25	26	22	2.5	2	157 000	195 000	16 000	19 900	2 600	3 400	HR 30216 J
	140	28.25	26	20	2.5	2	147 000	190 000	15 000	19 400	2 400	3 400	30216 CA
	140	35.25	33	28	2.5	2	192 000	254 000	19 600	25 900	2 600	3 400	HR 32216 J
	140	46	46	35	2.5	2	256 000	385 000	26 200	39 000	2 600	3 400	HR 33216 J
	170	42.5	39	33	3	2.5	276 000	330 000	28 200	33 500	2 200	3 000	HR 30316 J
	170	42.5	39	27	3	2.5	235 000	283 000	24 000	28 900	2 000	2 800	HR 30316 DJ
	170	42.5	39	27	3	2.5	235 000	283 000	24 000	28 900	2 000	2 800	HR 31316 J
	170	61.5	58	48	3	2.5	385 000	505 000	39 000	51 500	2 200	3 000	HR 32316 J
	170	61.5	58	48	3	2.5	365 000	530 000	37 500	54 000	2 200	3 000	HR 32316 CJ


備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計, 使用時請提出諮詢。



慶順五金·軸承  
WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 85~100 mm

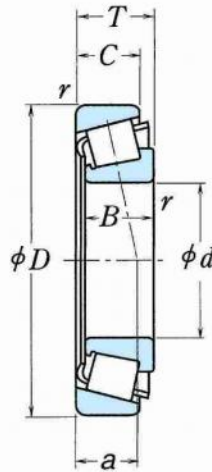

d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) {kgf}				極限轉速 (min <sup>-1</sup> )		代號
	D	T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
85	120	23	23	18	1.5	1.5	93 500	157 000	9 550	16 000	2 800	3 800	HR 32917 J
	130	29	29	22	1.5	1.5	143 000	231 000	14 600	23 600	2 600	3 600	HR 32017 XJ
	130	36	36	29.5	1.5	1.5	180 000	305 000	18 400	31 000	2 600	3 600	HR 33017 J
	140	41	41	32	2.5	2	230 000	365 000	23 500	37 000	2 400	3 400	HR 33117 J
	150	30.5	28	24	2.5	2	184 000	233 000	18 700	23 800	2 400	3 200	HR 30217 J
	150	30.5	28	22	2.5	2	171 000	226 000	17 500	23 000	2 200	3 200	30217 CA
	150	38.5	36	30	2.5	2	210 000	277 000	21 400	28 200	2 200	3 200	HR 32217 J
	150	49	49	37	2.5	2	281 000	415 000	28 700	42 500	2 400	3 200	HR 33217 J
	180	44.5	41	34	4	3	310 000	375 000	31 500	38 000	2 000	2 800	HR 30317 J
	180	44.5	41	28	4	3	261 000	315 000	26 600	32 000	1 900	2 600	HR 30317 DJ
180	44.5	41	28	4	3	261 000	315 000	26 600	32 000	1 900	2 600	HR 31317 J	
180	63.5	60	49	4	3	410 000	535 000	42 000	54 500	2 000	2 800	HR 32317 J	
90	125	23	23	18	1.5	1.5	97 000	167 000	9 850	17 000	2 600	3 600	HR 32918 J
	140	32	32	24	2	1.5	170 000	273 000	17 300	27 800	2 400	3 200	HR 32018 XJ
	140	39	39	32.5	2	1.5	220 000	360 000	22 400	37 000	2 400	3 200	HR 33018 J
	150	45	45	35	2.5	2	259 000	405 000	26 500	41 500	2 400	3 200	HR 33118 J
	160	32.5	30	26	2.5	2	201 000	256 000	20 500	26 100	2 200	3 000	HR 30218 J
	160	42.5	40	34	2.5	2	256 000	350 000	26 100	35 500	2 200	3 000	HR 32218 J
	190	46.5	43	36	4	3	345 000	425 000	35 500	43 000	1 900	2 600	HR 30318 J
	190	46.5	43	30	4	3	264 000	315 000	26 900	32 000	1 800	2 400	HR 30318 DJ
	190	46.5	43	30	4	3	264 000	315 000	26 900	32 000	1 800	2 400	HR 31318 J
	190	67.5	64	53	4	3	450 000	590 000	46 000	60 500	2 000	2 600	HR 32318 J
95	130	23	23	18	1.5	1.5	98 000	172 000	10 000	17 500	2 400	3 400	HR 32919 J
	145	32	32	24	2	1.5	173 000	283 000	17 600	28 900	2 400	3 200	HR 32019 XJ
	145	39	39	32.5	2	1.5	231 000	390 000	23 500	39 500	2 400	3 200	HR 33019 J
	160	46	46	38	3	3	283 000	445 000	28 800	45 500	2 200	3 000	T 2 ED095
	170	34.5	32	27	3	2.5	223 000	286 000	22 800	29 200	2 200	2 800	HR 30219 J
	170	45.5	43	37	3	2.5	289 000	400 000	29 500	40 500	2 200	2 800	HR 32219 J
	200	49.5	45	38	4	3	370 000	455 000	38 000	46 500	1 900	2 600	HR 30319 J
	200	49.5	45	36	4	3	350 000	430 000	35 500	44 000	1 800	2 400	30319 CA
	200	49.5	45	32	4	3	310 000	375 000	31 500	38 500	1 700	2 400	HR 30319 DJ
	200	49.5	45	32	4	3	310 000	375 000	31 500	38 500	1 700	2 400	HR 31319 J
200	71.5	67	55	4	3	525 000	710 000	53 500	72 500	1 900	2 600	HR 32319 J	
100	140	25	25	20	1.5	1.5	117 000	205 000	12 000	20 900	2 200	3 200	HR 32920 J
	145	24	22.5	17.5	3	3	113 000	163 000	11 500	16 600	2 200	3 000	T 4 CB100
	150	32	32	24	2	1.5	176 000	294 000	17 900	30 000	2 200	3 000	HR 32020 XJ
	150	39	39	32.5	2	1.5	235 000	405 000	24 000	41 500	2 200	3 000	HR 33020 J
	165	52	52	40	2.5	2	315 000	515 000	32 500	52 500	2 000	2 800	HR 33120 J
	180	37	34	29	3	2.5	255 000	330 000	26 000	34 000	2 000	2 600	HR 30220 J
	180	49	46	39	3	2.5	325 000	450 000	33 000	46 000	2 000	2 600	HR 32220 J
	180	63	63	48	3	2.5	410 000	635 000	42 000	65 000	2 000	2 600	HR 33220 J
	215	51.5	47	39	4	3	425 000	525 000	43 000	53 500	1 700	2 400	HR 30320 J
	215	56.5	51	35	4	3	385 000	505 000	39 000	51 500	1 500	2 200	HR 31320 J
215	77.5	73	60	4	3	565 000	755 000	57 500	77 000	1 700	2 400	HR 32320 J	


備註 中斜度型圓錐滾子軸承(代號帶有C者)是屬於特殊用途的設計,使用時請提出諮詢。



慶順五金·軸承  
WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 105~130 mm

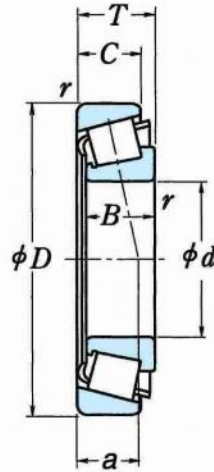

d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) {kgf}				極限轉速 (min <sup>-1</sup> )		代號
	D	T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
105	145	25	25	20	1.5	1.5	119 000	212 000	12 100	21 600	2 200	3 000	HR 32921 J
	160	35	35	26	2.5	2	204 000	340 000	20 800	34 500	2 000	2 800	HR 32021 XJ
	160	43	43	34	2.5	2	256 000	435 000	26 100	44 000	2 000	2 800	HR 33021 J
	190	39	36	30	3	2.5	280 000	365 000	28 500	37 500	1 900	2 600	HR 30221 J
	190	53	50	43	3	2.5	360 000	510 000	37 000	52 000	1 900	2 600	HR 32221 J
	225	53.5	49	41	4	3	455 000	565 000	46 500	57 500	1 600	2 200	HR 30321 J
	225	58	53	36	4	3	415 000	540 000	42 000	55 000	1 500	2 000	HR 31321 J
	225	81.5	77	63	4	3	670 000	925 000	68 000	94 500	1 700	2 200	HR 32321 J
110	150	25	25	20	1.5	1.5	123 000	224 000	12 500	22 800	2 200	2 800	HR 32922 J
	170	38	38	29	2.5	2	236 000	390 000	24 000	40 000	2 000	2 600	HR 32022 XJ
	170	47	47	37	2.5	2	294 000	515 000	30 000	52 500	2 000	2 600	HR 33022 J
	180	56	56	43	2.5	2	365 000	610 000	37 500	62 000	1 900	2 600	HR 33122 J
	200	41	38	32	3	2.5	315 000	420 000	32 000	43 000	1 800	2 400	HR 30222 J
	200	56	53	46	3	2.5	400 000	565 000	40 500	57 500	1 800	2 400	HR 32222 J
	240	54.5	50	42	4	3	485 000	595 000	49 500	60 500	1 500	2 000	HR 30322 J
	240	63	57	38	4	3	470 000	605 000	48 000	62 000	1 400	1 900	HR 31322 J
120	240	84.5	80	65	4	3	675 000	910 000	68 500	93 000	1 500	2 000	HR 32322 J
	165	29	29	23	1.5	1.5	161 000	291 000	16 400	29 700	1 900	2 600	HR 32924 J
	170	27	25	19.5	3	3	153 000	243 000	51 600	24 800	1 800	2 600	T 4 CB120
	180	38	38	29	2.5	2	242 000	405 000	24 600	41 000	1 800	2 400	HR 32024 XJ
	180	48	48	38	2.5	2	300 000	540 000	30 500	55 000	1 800	2 600	HR 33024 J
	200	62	62	48	2.5	2	460 000	755 000	46 500	77 000	1 700	2 400	HR 33124 J
	215	43.5	40	34	3	2.5	335 000	450 000	34 000	46 000	1 600	2 200	HR 30224 J
	215	61.5	58	50	3	2.5	440 000	635 000	44 500	65 000	1 600	2 200	HR 32224 J
	260	59.5	55	46	4	3	535 000	655 000	54 500	67 000	1 400	1 900	HR 30324 J
	260	68	62	42	4	3	560 000	730 000	57 000	74 500	1 300	1 800	HR 31324 J
130	260	90.5	86	69	4	3	770 000	1 060 000	78 500	108 000	1 400	1 900	HR 32324 J
	180	32	30	26	2	1.5	167 000	281 000	17 000	28 600	1 800	2 400	32926
	180	32	32	25	2	1.5	200 000	365 000	20 400	37 500	1 800	2 400	HR 32926 J
	185	29	27	21	3	3	183 000	296 000	18 600	30 000	1 700	2 400	T 4 CB130
	200	45	45	34	2.5	2	320 000	535 000	32 500	54 500	1 600	2 200	HR 32026 XJ
	200	55	55	43	2.5	2	395 000	715 000	40 500	73 000	1 700	2 200	HR 33026 J
	230	43.75	40	34	4	3	375 000	505 000	38 000	51 500	1 500	2 000	HR 30226 J
	230	67.75	64	54	4	3	530 000	790 000	54 000	80 500	1 500	2 000	HR 32226 J
	280	63.75	58	49	5	4	545 000	675 000	56 000	68 500	1 300	1 800	30326
	280	63.75	58	49	5	4	650 000	820 000	66 000	83 500	1 300	1 800	HR 30326 J
	280	72	66	44	5	4	625 000	820 000	63 500	83 500	1 200	1 700	HR 31326 J
	280	98.75	93	78	5	4	830 000	1 150 000	84 500	117 000	1 300	1 800	32326




慶順五金·軸承

WWW.CS1970.COM.TW

# 單列圓錐滾子軸承

內徑 140~170 mm

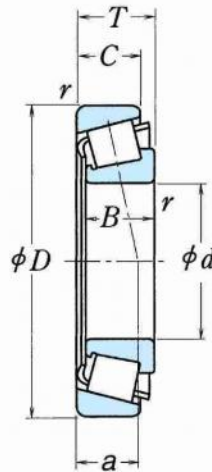


d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) [kgf]				極限轉速 (min <sup>-1</sup> )		代號	
	D	T	B	C			C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑		
140	190	32	32	25	2	1.5	206 000	390 000	21 000	39 500	1 700	2 200	HR 32928 J	
	210	45	45	34	2.5	2	325 000	555 000	33 000	57 000	1 600	2 200	HR 32028 XJ	
	210	56	56	44	2.5	2	410 000	770 000	42 000	78 500	1 600	2 200	HR 33028 J	
	250	45.75	42	36	4	3	390 000	515 000	40 000	52 500	1 400	1 900	HR 30228 J	
	250	71.75	68	58	4	3	610 000	915 000	62 000	93 500	1 400	1 900	HR 32228 J	
	300	67.75	62	53	5	4	740 000	945 000	75 500	96 500	1 200	1 700	HR 30328 J	
	300	77	70	47	5	4	695 000	955 000	71 000	97 500	1 100	1 500	HR 31328 J	
	300	107.75	102	85	5	4	985 000	1 440 000	101 000	147 000	1 200	1 600	32328	
	150	210	38	36	31	2.5	2	247 000	440 000	25 200	45 000	1 500	2 000	32930
		210	38	38	30	2.5	2	281 000	520 000	28 600	53 000	1 500	2 000	HR 32930 J
225		48	48	36	3	2.5	375 000	650 000	38 000	66 500	1 400	2 000	HR 32030 XJ	
225		59	59	46	3	2.5	435 000	805 000	44 000	82 000	1 400	2 000	HR 33030 J	
270		49	45	38	4	3	485 000	665 000	49 000	67 500	1 300	1 800	HR 30230 J	
270		77	73	60	4	3	705 000	1 080 000	71 500	110 000	1 300	1 800	HR 32230 J	
320		72	65	55	5	4	690 000	860 000	70 000	87 500	1 100	1 500	30330	
320		72	65	55	5	4	825 000	1 060 000	84 500	108 000	1 100	1 600	HR 30330 J	
320		82	75	50	5	4	790 000	1 100 000	80 500	112 000	1 000	1 400	HR 31330 J	
320		114	108	90	5	4	1 120 000	1 700 000	114 000	174 000	1 100	1 500	32330	
160	220	38	38	30	2.5	2	296 000	570 000	30 000	58 000	1 400	1 900	HR 32932 J	
	240	51	51	38	3	2.5	425 000	750 000	43 500	76 500	1 300	1 800	HR 32032 XJ	
	290	52	48	40	4	3	530 000	730 000	54 000	74 500	1 200	1 600	HR 30232 J	
	290	84	80	67	4	3	795 000	1 120 000	81 000	125 000	1 200	1 600	HR 32232 J	
	340	75	68	58	5	4	765 000	960 000	78 000	98 000	1 000	1 400	30332	
	340	75	68	58	5	4	870 000	1 110 000	89 000	113 000	1 100	1 400	HR 30332 J	
	340	75	68	48	5	4	675 000	875 000	69 000	89 000	950	1 300	30332 D	
	340	121	114	95	5	4	1 210 000	1 770 000	123 000	181 000	1 000	1 400	32332	
	170	230	38	36	31	2.5	2.5	258 000	485 000	26 300	49 500	1 300	1 800	32934
		230	38	38	30	2.5	2	294 000	560 000	30 000	57 000	1 400	1 800	HR 32934 J
260		57	57	43	3	2.5	505 000	890 000	51 500	90 500	1 200	1 700	HR 32034 XJ	
310		57	52	43	5	4	630 000	885 000	64 000	90 000	1 100	1 500	HR 30234 J	
310		91	86	71	5	4	930 000	1 450 000	94 500	148 000	1 100	1 500	HR 32234 J	
360		80	72	62	5	4	845 000	1 080 000	86 000	110 000	950	1 300	30334	
360		80	72	62	5	4	960 000	1 230 000	98 000	125 000	1 000	1 300	HR 30334 J	
360		80	72	50	5	4	760 000	1 040 000	77 500	106 000	900	1 200	30334 D	
360		127	120	100	5	4	1 370 000	2 050 000	140 000	209 000	1 000	1 300	32334	



# 單列圓錐滾子軸承

內徑 180~240 mm

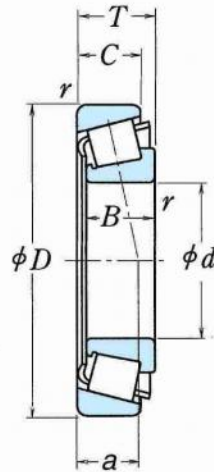


d	D	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) (kgf)				極限轉速 (min <sup>-1</sup> )		代號
		T	B	C		C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
180	250	45	45	34	2.5	2	350 000	685 000	36 000	69 500	1 300	1 700	HR 32936 J	
	280	64	64	48	3	2.5	640 000	1 130 000	65 000	115 000	1 200	1 600	HR 32036 XJ	
	320	57	52	43	5	4	650 000	930 000	66 000	95 000	1 100	1 400	HR 30236 J	
	320	91	86	71	5	4	960 000	1 540 000	98 000	157 000	1 100	1 400	HR 32236 J	
	380	83	75	64	5	4	935 000	1 230 000	95 500	126 000	900	1 300	30336	
	380	83	75	53	5	4	820 000	1 120 000	83 500	114 000	850	1 200	30336 D	
	380	134	126	106	5	4	1 520 000	2 290 000	155 000	234 000	950	1 300	32336	
190	260	45	45	34	2.5	2	365 000	715 000	37 000	73 000	1 200	1 600	HR 32938 J	
	290	64	64	48	3	2.5	650 000	1 170 000	66 000	119 000	1 100	1 500	HR 32038 XJ	
	340	60	55	46	5	4	760 000	1 080 000	77 500	111 000	1 000	1 300	HR 30238 J	
	340	97	92	75	5	4	1 110 000	1 770 000	113 000	181 000	1 000	1 400	HR 32238 J	
	400	86	78	65	6	5	1 010 000	1 340 000	103 000	136 000	850	1 200	30338	
	400	140	132	109	6	5	1 660 000	2 580 000	169 000	263 000	850	1 200	32338	
200	280	51	48	41	3	2.5	410 000	780 000	42 000	80 000	1 100	1 500	32940	
	280	51	51	39	3	2.5	480 000	935 000	48 500	95 000	1 100	1 500	HR 32940 J	
	310	70	70	53	3	2.5	760 000	1 370 000	77 500	139 000	1 000	1 400	HR 32040 XJ	
	360	64	58	48	5	4	825 000	1 180 000	84 000	121 000	950	1 300	HR 30240 J	
	360	104	98	82	5	4	1 210 000	1 920 000	123 000	196 000	950	1 300	HR 32240 J	
	420	89	80	67	6	5	1 030 000	1 390 000	105 000	142 000	850	1 200	30340	
	420	89	80	56	6	5	965 000	1 330 000	98 500	136 000	750	1 000	30340 D	
	420	146	138	115	6	5	1 820 000	2 870 000	185 000	292 000	800	1 100	32340	
220	300	51	51	39	3	2.5	490 000	990 000	50 000	101 000	1 000	1 400	HR 32944 J	
	340	76	76	57	4	3	885 000	1 610 000	90 500	164 000	950	1 300	HR 32044 XJ	
	400	72	65	54	5	4	810 000	1 150 000	82 500	117 000	850	1 100	30244	
	400	114	108	90	5	4	1 340 000	2 210 000	137 000	225 000	850	1 100	32244	
	460	97	88	73	6	5	1 430 000	1 990 000	146 000	203 000	750	1 000	30344	
	460	154	145	122	6	5	2 020 000	3 200 000	206 000	325 000	750	1 000	32344	
240	320	51	51	39	3	2.5	500 000	1 040 000	51 000	107 000	950	1 300	HR 32948 J	
	360	76	76	57	4	3	920 000	1 730 000	94 000	177 000	850	1 200	HR 32048 XJ	
	440	79	72	60	5	4	990 000	1 400 000	101 000	142 000	750	1 000	30248	
	440	127	120	100	5	4	1 630 000	2 730 000	166 000	278 000	750	1 000	32248	
	500	105	95	80	6	5	1 660 000	2 340 000	169 000	238 000	670	950	30348	
	500	165	155	132	6	5	2 520 000	4 100 000	257 000	415 000	670	900	32348	



# 單列圓錐滾子軸承

內徑 260~440 mm

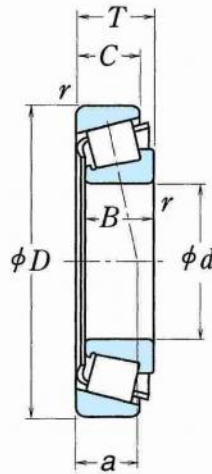

d	主要尺寸 (mm)				內輪 外輪 r (最小)		基本額定負荷 (N) (kgf)				極限轉速 (min <sup>-1</sup> )		代號
	D	T	B	C	C <sub>r</sub>	C <sub>0r</sub>	C <sub>r</sub>	C <sub>0r</sub>	脂潤滑	油潤滑			
260	360	63.5	63.5	48	3	2.5	730 000	1 450 000	74 500	148 000	850	1 100	HR 32952 J HR 32052 XJ 30252
	400	87	87	65	5	4	1 160 000	2 160 000	118 000	220 000	800	1 100	
	480	89	80	67	6	5	1 190 000	1 700 000	121 000	174 000	670	900	
	480	137	130	106	6	5	1 900 000	3 300 000	194 000	335 000	670	950	32252
	540	113	102	85	6	6	1 870 000	2 640 000	190 000	269 000	630	850	30352
	540	176	165	136	6	6	2 910 000	4 800 000	297 000	490 000	630	850	32352
280	380	63.5	63.5	48	3	2.5	765 000	1 580 000	78 000	162 000	800	1 100	HR 32956 J HR 32056 XJ 32056
	420	87	87	65	5	4	1 180 000	2 240 000	120 000	228 000	710	1 000	
	500	89	80	67	6	5	1 240 000	1 900 000	127 000	194 000	630	850	
	500	137	130	106	6	5	1 950 000	3 450 000	199 000	355 000	630	850	32256
580	187	175	145	6	6	3 300 000	5 400 000	335 000	550 000	560	800	32356	
300	420	76	72	62	4	3	895 000	1 820 000	91 000	186 000	710	950	32960 HR 32960 J HR 32060 XJ
	420	76	76	57	4	3	1 010 000	2 100 000	103 000	214 000	710	950	
	460	100	100	74	5	4	1 440 000	2 700 000	147 000	275 000	670	900	
	540	96	85	71	6	5	1 440 000	2 100 000	147 000	214 000	600	800	30260
540	149	140	115	6	5	2 220 000	3 700 000	226 000	380 000	600	800	32260	
320	440	76	72	63	4	3	900 000	1 880 000	92 000	192 000	970	900	32964 HR 32964 J HR 32064 XJ
	440	76	76	57	4	3	1 040 000	2 220 000	106 000	227 000	670	900	
	480	100	100	74	5	4	1 510 000	2 910 000	153 000	297 000	630	850	
	580	104	92	75	6	5	1 640 000	2 420 000	168 000	247 000	530	750	30264
	580	159	150	125	6	5	2 860 000	5 050 000	292 000	515 000	530	750	32264
	670	210	200	170	7.5	7.5	4 200 000	7 100 000	430 000	725 000	480	670	32364
340	460	76	72	63	4	3	910 000	1 940 000	93 000	197 000	630	850	32968 HR 32968 J 32068
	460	76	76	57	4	3	1 050 000	2 220 000	107 000	226 000	630	850	
	520	112	106	92	6	5	1 650 000	3 400 000	168 000	345 000	560	750	
360	480	76	72	62	4	3	945 000	2 100 000	965 000	214 000	600	800	32972 HR 32972 J 32072
	480	76	76	57	4	3	1 080 000	2 340 000	110 000	239 000	560	800	
	540	112	106	92	6	5	1 680 000	3 500 000	171 000	355 000	530	750	
380	520	87	82	71	5	4	1 210 000	2 550 000	124 000	260 000	560	750	32976
400	540	87	82	71	5	4	1 250 000	2 700 000	128 000	276 000	530	710	32980 32080
	600	125	118	100	6	5	1 960 000	4 050 000	200 000	415 000	480	670	
420	560	87	82	72	5	4	1 300 000	2 810 000	132 000	287 000	500	670	32984 32084
	620	125	118	100	6	5	2 000 000	4 200 000	204 000	430 000	450	630	
440	650	130	122	104	6	6	2 230 000	4 600 000	227 000	470 000	430	600	32088



慶順五金·軸承

WWW.CS1970.COM.TW