


單列斜角滾珠軸承・成對雙聯斜角滾珠軸承

內徑 10~17 mm

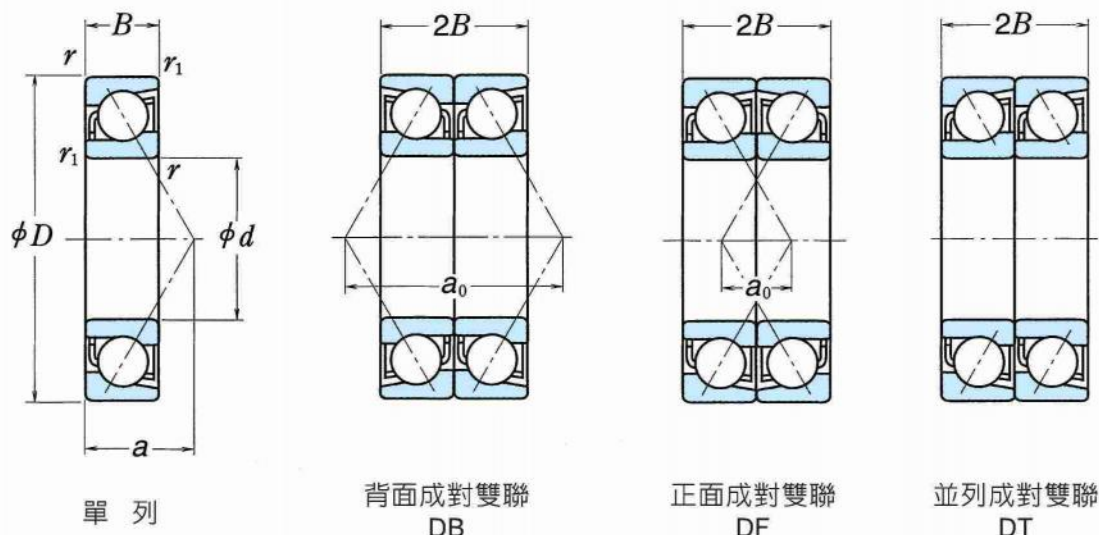

主 要 尺 寸 (mm)					基本額定負荷 (單列) (N)				係數	極 限 轉 速 (1) (min ⁻¹)		作用點 位 置 (mm)	代 號 (2)			
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> (最小)	<i>r</i> ₁ (最小)	<i>C_r</i>	<i>C</i> _{0<i>r</i>}	<i>C_r</i>	<i>C</i> _{0<i>r</i>}	<i>f</i> ₀	脂潤滑	油潤滑	<i>a</i>	單 列	成 對 雙 聯		
10	22	6	0.3	0.15	2 880	1 450	294	148	—	40 000	56 000	6.7	7900 A5	DB	DF	DT
	22	6	0.3	0.15	3 000	1 520	305	155	14.1	48 000	63 000	5.1	7900 C	DB	DF	DT
	26	8	0.3	0.15	5 350	2 600	550	266	—	32 000	43 000	9.2	7000 A	DB	DF	DT
	26	8	0.3	0.15	5 300	2 490	540	254	12.6	45 000	63 000	6.4	7000 C	DB	DF	DT
	30	9	0.6	0.3	5 400	2 710	555	276	—	28 000	38 000	10.3	7200 A	DB	DF	DT
	30	9	0.6	0.3	5 000	2 500	510	255	—	20 000	28 000	12.9	7200 B	DB	DF	DT
	30	9	0.6	0.3	5 400	2 610	550	266	13.2	40 000	56 000	7.2	7200 C	DB	DF	DT
	35	11	0.6	0.3	9 300	4 300	950	440	—	20 000	26 000	12.0	7300 A	DB	DF	DT
	35	11	0.6	0.3	8 750	4 050	890	410	—	18 000	24 000	14.9	7300 B	DB	DF	DT
12	24	6	0.3	0.15	3 200	1 770	325	181	—	38 000	53 000	7.2	7901 A5	DB	DF	DT
	24	6	0.3	0.15	3 350	1 860	340	189	14.7	45 000	63 000	5.4	7901 C	DB	DF	DT
	28	8	0.3	0.15	5 800	2 980	590	305	—	28 000	38 000	9.8	7001 A	DB	DF	DT
	28	8	0.3	0.15	5 800	2 900	590	296	13.2	40 000	56 000	6.7	7001 C	DB	DF	DT
	32	10	0.6	0.3	8 000	4 050	815	410	—	26 000	34 000	11.4	7201 A	DB	DF	DT
	32	10	0.6	0.3	7 450	3 750	760	380	—	18 000	26 000	14.2	7201 B	DB	DF	DT
	32	10	0.6	0.3	7 900	3 850	805	395	12.5	36 000	50 000	7.9	7201 C	DB	DF	DT
	37	12	1	0.6	9 450	4 500	965	460	—	18 000	24 000	13.1	7301 A	DB	DF	DT
	37	12	1	0.6	8 850	4 200	900	425	—	16 000	22 000	16.3	7301 B	DB	DF	DT
15	28	7	0.3	0.15	4 550	2 530	465	258	—	32 000	43 000	8.5	7902 A5	DB	DF	DT
	28	7	0.3	0.15	4 750	2 640	485	270	14.5	38 000	53 000	6.4	7902 C	DB	DF	DT
	32	9	0.3	0.15	6 100	3 450	625	350	—	24 000	32 000	11.3	7002 A	DB	DF	DT
	32	9	0.3	0.15	6 250	3 400	635	345	14.1	34 000	48 000	7.6	7002 C	DB	DF	DT
	35	11	0.6	0.3	8 650	4 650	880	475	—	22 000	30 000	12.7	7202 A	DB	DF	DT
	35	11	0.6	0.3	7 950	4 300	810	440	—	16 000	22 000	16.0	7202 B	DB	DF	DT
	35	11	0.6	0.3	8 650	4 550	885	460	13.2	32 000	45 000	8.8	7202 C	DB	DF	DT
	42	13	1	0.6	13 400	7 100	1 370	720	—	16 000	22 000	14.7	7302 A	DB	DF	DT
	42	13	1	0.6	12 500	6 600	1 270	670	—	14 000	19 000	18.5	7302 B	DB	DF	DT
17	30	7	0.3	0.15	4 750	2 800	485	286	—	30 000	40 000	9.0	7903 A5	DB	DF	DT
	30	7	0.3	0.15	5 000	2 940	510	299	14.8	34 000	48 000	6.6	7903 C	DB	DF	DT
	35	10	0.3	0.15	6 400	3 800	655	390	—	22 000	30 000	12.5	7003 A	DB	DF	DT
	35	10	0.3	0.15	6 600	3 800	675	390	14.5	32 000	43 000	8.5	7003 C	DB	DF	DT
	40	12	0.6	0.3	10 800	6 000	1 100	610	—	20 000	28 000	14.2	7203 A	DB	DF	DT
	40	12	0.6	0.3	9 950	5 500	1 010	565	—	14 000	19 000	18.0	7203 B	DB	DF	DT
	40	12	0.6	0.3	10 900	5 850	1 110	595	13.3	28 000	38 000	9.8	7203 C	DB	DF	DT
	47	14	1	0.6	15 900	8 650	1 630	880	—	14 000	19 000	16.2	7303 A	DB	DF	DT
	47	14	1	0.6	14 800	8 000	1 510	820	—	13 000	17 000	20.4	7303 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為"—" 者是根據d_a(最小)、r_a(最大)。



慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承

內徑 20~35 mm

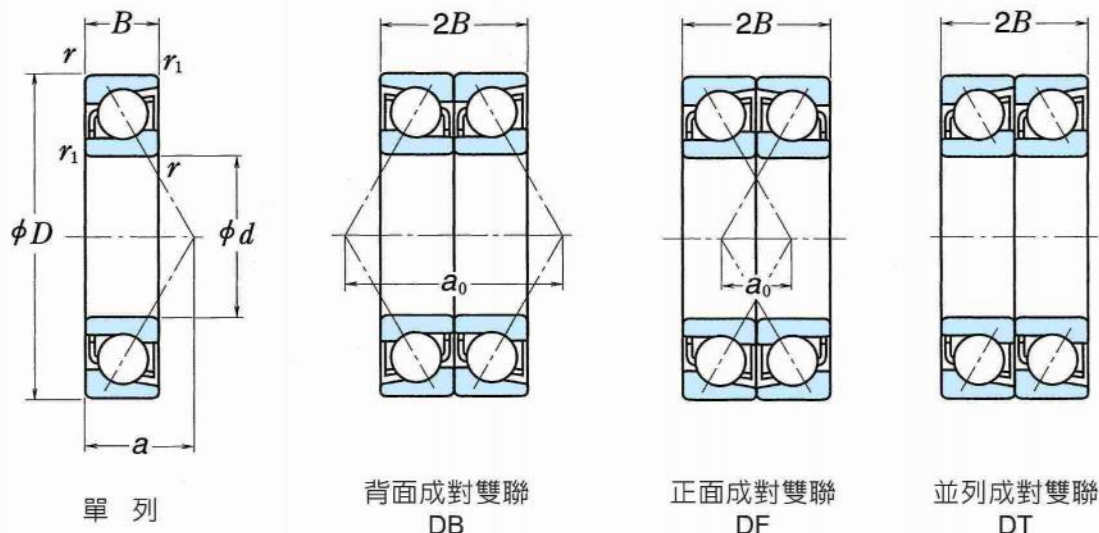

主 要 尺 寸 (mm)						基本額定負荷 (單列) (N)				係數	極限轉速 (1) (min ⁻¹)		作用點 位 置 (mm)	代 號 ⁽²⁾			
d	D	B	r	r ₁	(最小) (最小)	C _r	C _{0r}	C _r	C _{0r}	f ₀	脂潤滑	油潤滑	a	單 列	成 對 雙 聯		
20	37	9	0.3	0.15		6 600	4 050	675	410	—	24 000	32 000	11.1	7904 A5	DB	DF	DT
	37	9	0.3	0.15		6 950	4 250	710	430	14.9	28 000	38 000	8.3	7904 C	DB	DF	DT
	42	12	0.6	0.3		10 800	6 600	1 110	670	—	18 000	24 000	14.9	7004 A	DB	DF	DT
	42	12	0.6	0.3		11 100	6 550	1 130	665	14.0	26 000	36 000	10.1	7004 C	DB	DF	DT
	47	14	1	0.6		14 500	8 300	1 480	845	—	17 000	22 000	16.7	7204 A	DB	DF	DT
	47	14	1	0.6		13 300	7 650	1 360	780	—	12 000	16 000	21.1	7204 B	DB	DF	DT
	47	14	1	0.6		14 600	8 050	1 480	825	13.3	24 000	34 000	11.5	7204 C	DB	DF	DT
	52	15	1.1	0.6		18 700	10 400	1 910	1 060	—	13 000	17 000	17.9	7304 A	DB	DF	DT
	52	15	1.1	0.6		17 300	9 650	1 770	985	—	11 000	15 000	22.6	7304 B	DB	DF	DT
	52	15	1.1	0.6		17 300	9 650	1 770	985	—	11 000	15 000	22.6	7304 B	DB	DF	DT
25	42	9	0.3	0.15		7 450	5 150	760	525	—	20 000	28 000	12.3	7905 A5	DB	DF	DT
	42	9	0.3	0.15		7 850	5 400	800	555	15.5	24 000	34 000	9.0	7905 C	DB	DF	DT
	47	12	0.6	0.3		11 300	7 400	1 150	750	—	16 000	22 000	16.4	7005 A	DB	DF	DT
	47	12	0.6	0.3		11 700	7 400	1 190	755	14.7	22 000	30 000	10.8	7005 C	DB	DF	DT
	52	15	1	0.6		16 200	10 300	1 650	1 050	—	15 000	20 000	18.6	7205 A	DB	DF	DT
	52	15	1	0.6		14 800	9 400	1 510	960	—	10 000	14 000	23.7	7205 B	DB	DF	DT
	52	15	1	0.6		16 600	10 200	1 690	1 040	14.0	22 000	28 000	12.7	7205 C	DB	DF	DT
	62	17	1.1	0.6		26 400	15 800	2 690	1 610	—	10 000	14 000	21.1	7305 A	DB	DF	DT
	62	17	1.1	0.6		24 400	14 600	2 490	1 490	—	9 000	13 000	26.7	7305 B	DB	DF	DT
	62	17	1.1	0.6		24 400	14 600	2 490	1 490	—	9 000	13 000	26.7	7305 B	DB	DF	DT
30	47	9	0.3	0.15		7 850	5 950	800	605	—	18 000	24 000	13.5	7906 A5	DB	DF	DT
	47	9	0.3	0.15		8 300	6 250	845	640	15.9	22 000	28 000	9.7	7906 C	DB	DF	DT
	55	13	1	0.6		14 500	10 100	1 480	1 030	—	13 000	18 000	18.8	7006 A	DB	DF	DT
	55	13	1	0.6		15 100	10 300	1 540	1 050	14.9	19 000	26 000	12.2	7006 C	DB	DF	DT
	62	16	1	0.6		22 500	14 800	2 300	1 510	—	12 000	17 000	21.3	7206 A	DB	DF	DT
	62	16	1	0.6		20 500	13 500	2 090	1 380	—	8 500	12 000	27.3	7206 B	DB	DF	DT
	62	16	1	0.6		23 000	14 700	2 350	1 500	13.9	18 000	24 000	14.2	7206 C	DB	DF	DT
	72	19	1.1	0.6		33 500	20 900	3 450	2 130	—	9 000	12 000	24.2	7306 A	DB	DF	DT
	72	19	1.1	0.6		31 000	19 300	3 150	1 960	—	8 000	11 000	30.9	7306 B	DB	DF	DT
	72	19	1.1	0.6		31 000	19 300	3 150	1 960	—	8 000	11 000	30.9	7306 B	DB	DF	DT
35	55	10	0.6	0.3		11 400	8 700	1 170	885	—	15 000	20 000	15.5	7907 A5	DB	DF	DT
	55	10	0.6	0.3		12 100	9 150	1 230	930	15.7	18 000	24 000	11.0	7907 C	DB	DF	DT
	62	14	1	0.6		18 300	13 400	1 870	1 370	—	12 000	16 000	21.0	7007 A	DB	DF	DT
	62	14	1	0.6		19 100	13 700	1 950	1 390	15.0	17 000	22 000	13.5	7007 C	DB	DF	DT
	72	17	1.1	0.6		29 700	20 100	3 050	2 050	—	10 000	14 000	23.9	7207 A	DB	DF	DT
	72	17	1.1	0.6		27 100	18 400	2 760	1 870	—	7 500	10 000	30.9	7207 B	DB	DF	DT
	72	17	1.1	0.6		30 500	19 900	3 100	2 030	13.9	15 000	20 000	15.7	7207 C	DB	DF	DT
	80	21	1.5	1		40 000	26 300	4 050	2 680	—	8 000	10 000	27.1	7307 A	DB	DF	DT
	80	21	1.5	1		36 500	24 200	3 750	2 460	—	7 100	9 500	34.6	7307 B	DB	DF	DT
	80	21	1.5	1		36 500	24 200	3 750	2 460	—	7 100	9 500	34.6	7307 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為"—" 者是根據 d_a(最小)、r_a(最大)。



慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承

內徑 40~55 mm

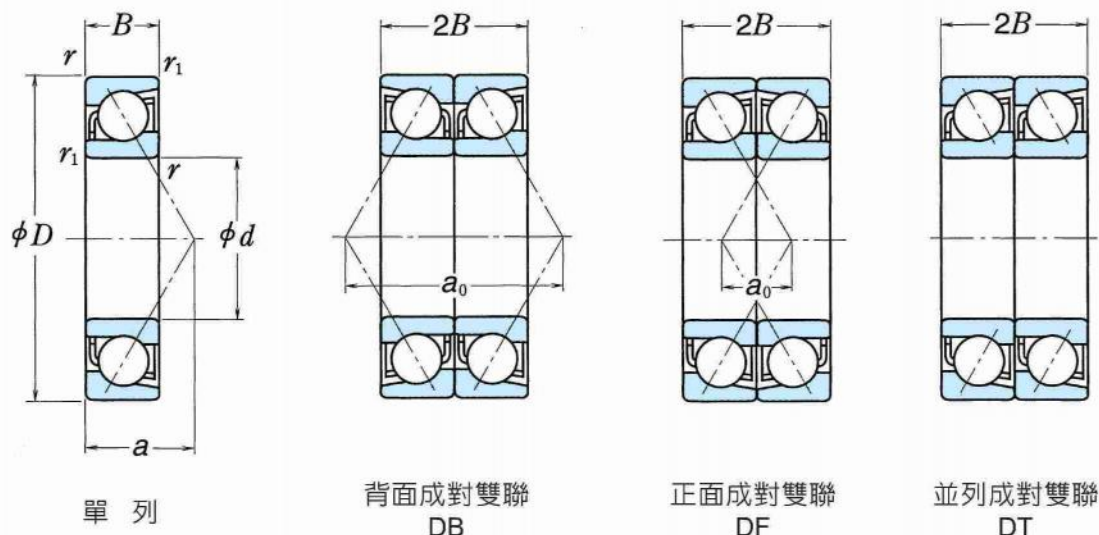

主要尺寸 (mm)					基本額定負荷 (單列)				係數	極限轉速 (1)		作用點位置 (mm)	代 號 ⁽²⁾			
d	D	B	r	r ₁	(N)		{kgf}		f ₀	脂潤滑	油潤滑	a	單列	成對雙聯		
			(最小)	(最小)	C _r	C _{0r}	C _r	C _{0r}								
40	62	12	0.6	0.3	14 300	11 200	1 460	1 140	—	14 000	18 000	17.9	7908 A5	DB	DF	DT
	62	12	0.6	0.3	15 100	11 700	1 540	1 200	15.7	16 000	22 000	12.8	7908 C	DB	DF	DT
	68	15	1	0.6	19 500	15 400	1 990	1 570	—	10 000	14 000	23.1	7008 A	DB	DF	DT
	68	15	1	0.6	20 600	15 900	2 100	1 620	15.4	15 000	20 000	14.7	7008 C	DB	DF	DT
	80	18	1.1	0.6	35 500	25 100	3 600	2 560	—	9 500	13 000	26.3	7208 A	DB	DF	DT
	80	18	1.1	0.6	32 000	23 000	3 250	2 340	—	6 700	9 000	34.2	7208 B	DB	DF	DT
	80	18	1.1	0.6	36 500	25 200	3 700	2 570	14.1	14 000	19 000	17.0	7208 C	DB	DF	DT
	90	23	1.5	1	49 000	33 000	5 000	3 350	—	7 100	9 000	30.3	7308 A	DB	DF	DT
	90	23	1.5	1	45 000	30 500	4 550	3 100	—	6 300	8 500	38.8	7308 B	DB	DF	DT
	45	68	12	0.6	15 100	12 700	1 540	1 290	—	12 000	17 000	19.2	7909 A5	DB	DF	DT
		68	12	0.6	16 000	13 400	1 630	1 360	16.0	14 000	20 000	13.6	7909 C	DB	DF	DT
		75	16	1	23 100	18 700	2 360	1 910	—	9 500	13 000	25.3	7009 A	DB	DF	DT
		75	16	1	24 400	19 300	2 490	1 960	15.4	14 000	19 000	16.0	7009 C	DB	DF	DT
		85	19	1.1	39 500	28 700	4 050	2 930	—	8 500	12 000	28.3	7209 A	DB	DF	DT
		85	19	1.1	36 000	26 200	3 650	2 680	—	6 300	8 500	36.8	7209 B	DB	DF	DT
		85	19	1.1	41 000	28 800	4 150	2 940	14.2	12 000	17 000	18.2	7209 C	DB	DF	DT
		100	25	1.5	63 500	43 500	6 450	4 450	—	6 300	8 500	33.4	7309 A	DB	DF	DT
		100	25	1.5	58 500	40 000	5 950	4 100	—	5 600	7 500	42.9	7309 B	DB	DF	DT
50	72	12	0.6	0.3	15 900	14 200	1 630	1 450	—	11 000	15 000	20.2	7910 A5	DB	DF	DT
	72	12	0.6	0.3	16 900	15 000	1 720	1 530	16.2	13 000	18 000	14.2	7910 C	DB	DF	DT
	80	16	1	0.6	24 500	21 100	2 500	2 150	—	8 500	12 000	26.8	7010 A	DB	DF	DT
	80	16	1	0.6	26 000	21 900	2 650	2 230	15.7	12 000	17 000	16.7	7010 C	DB	DF	DT
	90	20	1.1	0.6	41 500	31 500	4 200	3 200	—	8 000	11 000	30.2	7210 A	DB	DF	DT
	90	20	1.1	0.6	37 500	28 600	3 800	2 920	—	5 600	8 000	39.4	7210 B	DB	DF	DT
	90	20	1.1	0.6	43 000	31 500	4 350	3 250	14.5	12 000	16 000	19.4	7210 C	DB	DF	DT
	110	27	2	1	74 000	52 000	7 550	5 300	—	5 600	7 500	36.6	7310 A	DB	DF	DT
	110	27	2	1	68 000	48 000	6 950	4 900	—	5 000	6 700	47.1	7310 B	DB	DF	DT
	55	80	13	1	18 100	16 800	1 840	1 710	—	10 000	14 000	22.2	7911 A5	DB	DF	DT
		80	13	1	19 100	17 700	1 950	1 810	16.3	12 000	16 000	15.5	7911 C	DB	DF	DT
		90	18	1.1	32 500	27 700	3 300	2 830	—	7 500	11 000	29.9	7011 A	DB	DF	DT
		90	18	1.1	34 000	28 600	3 500	2 920	15.5	11 000	15 000	18.7	7011 C	DB	DF	DT
		100	21	1.5	51 000	39 500	5 200	4 050	—	7 100	10 000	32.9	7211 A	DB	DF	DT
		100	21	1.5	46 500	36 000	4 700	3 700	—	5 300	7 100	43.0	7211 B	DB	DF	DT
		100	21	1.5	53 000	40 000	5 400	4 100	14.5	10 000	14 000	20.9	7211 C	DB	DF	DT
		120	29	2	86 000	61 500	8 750	6 250	—	5 000	6 700	39.8	7311 A	DB	DF	DT
	120	29	2	1	79 000	56 500	8 050	5 750	—	4 500	6 300	51.2	7311 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為"—" 者是根據 d_a (最小)、r_a (最大)。



慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承

內徑 60~75 mm

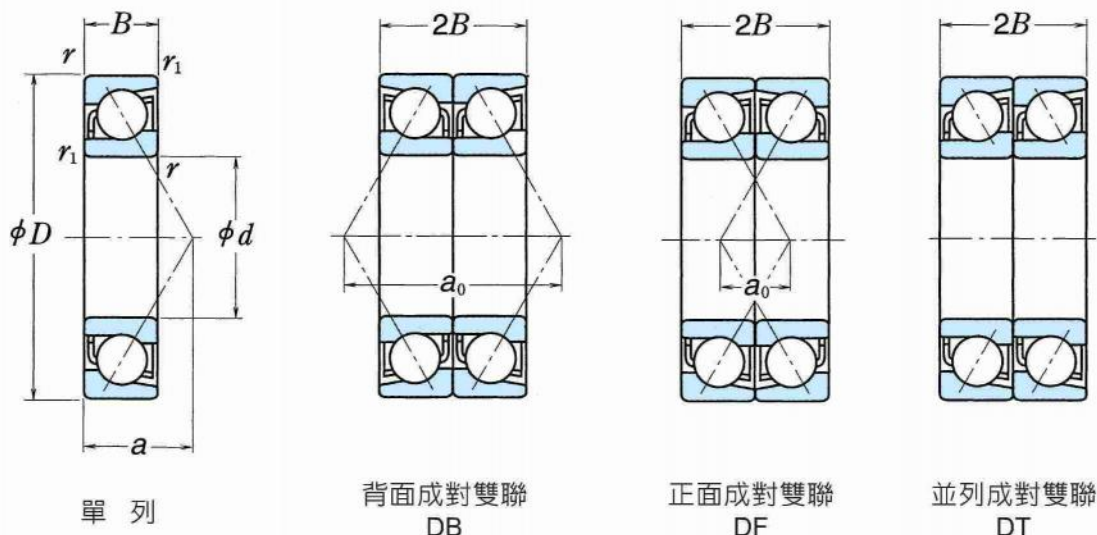

主要尺寸 (mm)						基本額定負荷 (單列)				係數	極限轉速 (1)		作用點位置 (mm)	代 號 (2)			
d	D	B	r	r ₁	(最小) (最小)	C _r	C _{0r}	C _r	C _{0r}	f ₀	脂潤滑	油潤滑	a	單列	成對雙聯		
60	85	13	1	0.6		18 300	17 700	1 870	1 810	—	9 500	13 000	23.4	7912 A5	DB	DF	DT
	85	13	1	0.6		19 400	18 700	1 980	1 910	16.5	11 000	15 000	16.2	7912 C	DB	DF	DT
	95	18	1.1	0.6		33 000	29 500	3 350	3 000	—	7 100	10 000	31.4	7012 A	DB	DF	DT
	95	18	1.1	0.6		35 000	30 500	3 600	3 150	15.7	10 000	14 000	19.4	7012 C	DB	DF	DT
	110	22	1.5	1		62 000	48 500	6 300	4 950	—	6 700	9 000	35.5	7212 A	DB	DF	DT
	110	22	1.5	1		56 000	44 500	5 700	4 550	—	4 800	6 300	46.7	7212 B	DB	DF	DT
	110	22	1.5	1		64 000	49 000	6 550	5 000	14.4	9 500	13 000	22.4	7212 C	DB	DF	DT
	130	31	2.1	1.1		98 000	71 500	10 000	7 250	—	4 800	6 300	42.9	7312 A	DB	DF	DT
	130	31	2.1	1.1		90 000	65 500	9 200	6 700	—	4 300	5 600	55.4	7312 B	DB	DF	DT
	130	31	2.1	1.1		90 000	65 500	9 200	6 700	—	4 300	5 600	55.4	7312 B	DB	DF	DT
65	90	13	1	0.6		19 100	19 400	1 940	1 980	—	9 000	12 000	24.6	7913 A5	DB	DF	DT
	90	13	1	0.6		20 200	20 500	2 060	2 090	16.7	10 000	14 000	16.9	7913 C	DB	DF	DT
	100	18	1.1	0.6		35 000	33 000	3 550	3 350	—	6 700	9 500	32.8	7013 A	DB	DF	DT
	100	18	1.1	0.6		37 000	34 500	3 800	3 500	15.9	10 000	13 000	20.0	7013 C	DB	DF	DT
	120	23	1.5	1		70 500	58 000	7 150	5 900	—	6 000	8 500	38.2	7213 A	DB	DF	DT
	120	23	1.5	1		63 500	52 500	6 500	5 350	—	4 300	6 000	50.3	7213 B	DB	DF	DT
	120	23	1.5	1		73 000	58 500	7 450	6 000	14.6	9 000	12 000	23.9	7213 C	DB	DF	DT
	140	33	2.1	1.1		111 000	82 000	11 300	8 350	—	4 300	6 000	46.1	7313 A	DB	DF	DT
	140	33	2.1	1.1		102 000	75 500	10 400	7 700	—	3 800	5 300	59.5	7313 B	DB	DF	DT
	140	33	2.1	1.1		102 000	75 500	10 400	7 700	—	3 800	5 300	59.5	7313 B	DB	DF	DT
70	100	16	1	0.6		26 500	26 300	2 710	2 680	—	8 000	11 000	27.8	7914 A5	DB	DF	DT
	100	16	1	0.6		28 100	27 800	2 870	2 830	16.4	9 500	13 000	19.4	7914 C	DB	DF	DT
	110	20	1.1	0.6		44 000	41 500	4 500	4 200	—	6 300	8 500	36.0	7014 A	DB	DF	DT
	110	20	1.1	0.6		47 000	43 000	4 800	4 400	15.7	9 000	12 000	22.1	7014 C	DB	DF	DT
	125	24	1.5	1		76 500	63 500	7 800	6 500	—	5 600	8 000	40.1	7214 A	DB	DF	DT
	125	24	1.5	1		69 000	58 000	7 050	5 900	—	4 000	5 600	52.9	7214 B	DB	DF	DT
	125	24	1.5	1		79 500	64 500	8 100	6 600	14.6	8 500	11 000	25.1	7214 C	DB	DF	DT
	150	35	2.1	1.1		125 000	93 500	12 700	9 550	—	4 000	5 300	49.3	7314 A	DB	DF	DT
	150	35	2.1	1.1		114 000	86 000	11 700	8 750	—	3 600	5 000	63.6	7314 B	DB	DF	DT
	150	35	2.1	1.1		114 000	86 000	11 700	8 750	—	3 600	5 000	63.6	7314 B	DB	DF	DT
75	105	16	1	0.6		26 900	27 700	2 750	2 820	—	7 500	10 000	29.0	7915 A5	DB	DF	DT
	105	16	1	0.6		28 600	29 300	2 910	2 980	16.6	9 000	12 000	20.1	7915 C	DB	DF	DT
	115	20	1.1	0.6		45 000	43 500	4 600	4 450	—	6 000	8 000	37.4	7015 A	DB	DF	DT
	115	20	1.1	0.6		48 000	45 500	4 900	4 650	15.9	8 500	12 000	22.7	7015 C	DB	DF	DT
	130	25	1.5	1		76 000	64 500	7 750	6 550	—	5 600	7 500	42.1	7215 A	DB	DF	DT
	130	25	1.5	1		68 500	58 500	7 000	5 950	—	3 800	5 300	55.5	7215 B	DB	DF	DT
	130	25	1.5	1		83 000	70 000	8 450	7 100	14.8	8 000	11 000	26.2	7215 C	DB	DF	DT
	160	37	2.1	1.1		136 000	106 000	13 800	10 800	—	3 800	5 000	52.4	7315 A	DB	DF	DT
	160	37	2.1	1.1		125 000	97 500	12 700	9 900	—	3 400	4 800	67.8	7315 B	DB	DF	DT
	160	37	2.1	1.1		125 000	97 500	12 700	9 900	—	3 400	4 800	67.8	7315 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為"—" 者是根據d_a(最小)、r_a(最大)。




慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承


內徑 80~95 mm

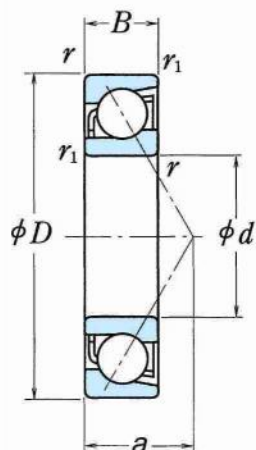


單 列

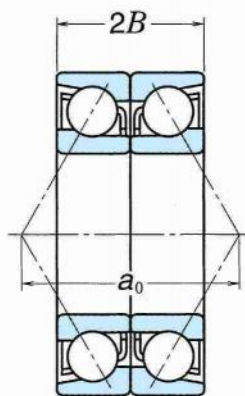

背面成對雙聯
DB

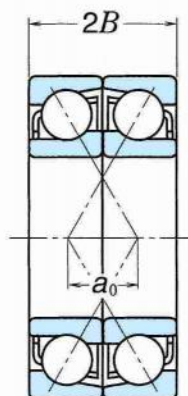

正面成對雙聯
DF

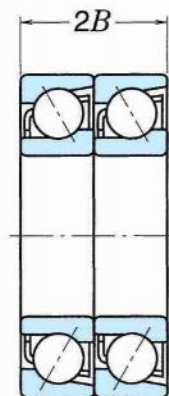

並列成對雙聯
DT

主 要 尺 寸 (mm)					基本額定負荷 (單列)				係數	極限轉速 (1)		作用點 位 置 (mm)	代 號 ⁽²⁾			
d	D	B	r	r ₁	(N)		{kgf}		f ₀	脂潤滑	油潤滑	a	單 列	成 對 雙 聯		
			(最小)	(最小)	C _r	C _{0r}	C _r	C _{0r}								
80	110	16	1	0.6	27 300	29 000	2 790	2 960	—	7 100	10 000	30.2	7916 A5	DB	DF	DT
	110	16	1	0.6	29 000	30 500	2 960	3 150	16.7	8 500	12 000	20.7	7916 C	DB	DF	DT
	125	22	1.1	0.6	55 000	53 000	5 650	5 400	—	5 600	7 500	40.6	7016 A	DB	DF	DT
	125	22	1.1	0.6	58 500	55 500	6 000	5 650	15.7	8 000	11 000	24.7	7016 C	DB	DF	DT
	140	26	2	1	89 000	76 000	9 100	7 750	—	5 000	7 100	44.8	7216 A	DB	DF	DT
	140	26	2	1	80 500	69 500	8 200	7 050	—	3 600	5 000	59.1	7216 B	DB	DF	DT
	140	26	2	1	93 000	77 500	9 450	7 900	14.7	7 500	10 000	27.7	7216 C	DB	DF	DT
	170	39	2.1	1.1	147 000	119 000	15 000	12 100	—	3 600	4 800	55.6	7316 A	DB	DF	DT
	170	39	2.1	1.1	135 000	109 000	13 800	11 100	—	3 200	4 300	71.9	7316 B	DB	DF	DT
	170	39	2.1	1.1	147 000	119 000	15 000	12 100	—	3 600	4 800	55.6	7316 A	DB	DF	DT
85	120	18	1.1	0.6	36 500	38 500	3 750	3 900	—	6 700	9 000	32.9	7917 A5	DB	DF	DT
	120	18	1.1	0.6	39 000	40 500	3 950	4 150	16.5	8 000	11 000	22.7	7917 C	DB	DF	DT
	130	22	1.1	0.6	56 500	56 000	5 750	5 700	—	5 300	7 100	42.0	7017 A	DB	DF	DT
	130	22	1.1	0.6	60 000	58 500	6 150	6 000	15.9	7 500	10 000	25.4	7017 C	DB	DF	DT
	150	28	2	1	103 000	89 000	10 500	9 100	—	4 800	6 700	47.9	7217 A	DB	DF	DT
	150	28	2	1	93 000	81 000	9 500	8 250	—	3 400	4 800	63.3	7217 B	DB	DF	DT
	150	28	2	1	107 000	90 500	10 900	9 250	14.7	6 700	9 500	29.7	7217 C	DB	DF	DT
	180	41	3	1.1	159 000	133 000	16 200	13 500	—	3 400	4 500	58.8	7317 A	DB	DF	DT
	180	41	3	1.1	146 000	122 000	14 800	12 400	—	3 000	4 000	76.1	7317 B	DB	DF	DT
	180	41	3	1.1	159 000	133 000	16 200	13 500	—	3 400	4 500	58.8	7317 A	DB	DF	DT
90	125	18	1.1	0.6	39 500	43 500	4 000	4 450	—	6 300	8 500	34.1	7918 A5	DB	DF	DT
	125	18	1.1	0.6	41 500	46 000	4 250	4 700	16.6	7 500	10 000	23.4	7918 C	DB	DF	DT
	140	24	1.5	1	67 500	66 500	6 850	6 750	—	4 800	6 700	45.2	7018 A	DB	DF	DT
	140	24	1.5	1	71 500	69 000	7 300	7 050	15.7	7 100	9 500	27.4	7018 C	DB	DF	DT
	160	30	2	1	118 000	103 000	12 000	10 500	—	4 500	6 000	51.1	7218 A	DB	DF	DT
	160	30	2	1	107 000	94 000	10 900	9 550	—	3 200	4 300	67.4	7218 B	DB	DF	DT
	160	30	2	1	123 000	105 000	12 500	10 700	14.6	6 300	9 000	31.7	7218 C	DB	DF	DT
	190	43	3	1.1	171 000	147 000	17 400	15 000	—	3 200	4 300	61.9	7318 A	DB	DF	DT
	190	43	3	1.1	156 000	135 000	15 900	13 800	—	2 800	3 800	80.2	7318 B	DB	DF	DT
	190	43	3	1.1	171 000	147 000	17 400	15 000	—	3 200	4 300	61.9	7318 A	DB	DF	DT
95	130	18	1.1	0.6	40 000	45 500	4 050	4 650	—	6 000	8 500	35.2	7919 A5	DB	DF	DT
	130	18	1.1	0.6	42 500	48 000	4 300	4 900	16.7	7 100	10 000	24.1	7919 C	DB	DF	DT
	145	24	1.5	1	67 000	67 000	6 800	6 800	—	4 500	6 300	46.6	7019 A	DB	DF	DT
	145	24	1.5	1	73 500	73 000	7 500	7 450	15.9	6 700	9 000	28.1	7019 C	DB	DF	DT
	170	32	2.1	1.1	128 000	111 000	13 000	11 300	—	4 300	5 600	54.2	7219 A	DB	DF	DT
	170	32	2.1	1.1	116 000	101 000	11 800	10 300	—	3 000	4 000	71.6	7219 B	DB	DF	DT
	170	32	2.1	1.1	133 000	112 000	13 500	11 400	14.6	6 000	8 500	33.7	7219 C	DB	DF	DT
	200	45	3	1.1	183 000	162 000	18 600	16 600	—	3 000	4 000	65.1	7319 A	DB	DF	DT
	200	45	3	1.1	167 000	149 000	17 100	15 200	—	2 600	3 600	84.3	7319 B	DB	DF	DT
	200	45	3	1.1	183 000	162 000	18 600	16 600	—	3 000	4 000	65.1	7319 A	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為“—”者是根據d_a(最小)、r_a(最大)。



慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承

內徑 100~120 mm

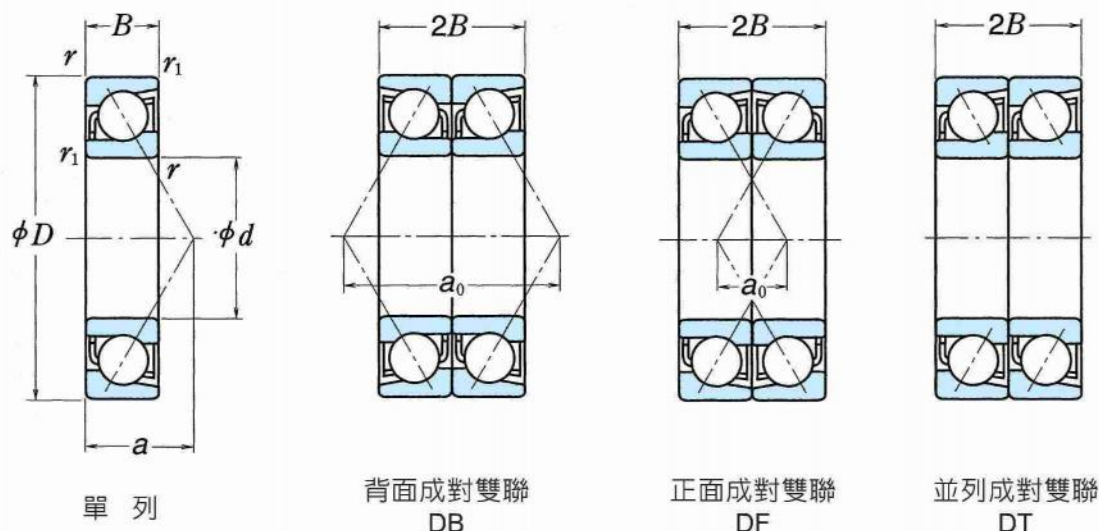

主 要 尺 寸 (mm)					基本額定負荷 (單列) (N) {kgf}				係數	極限轉速 ⁽¹⁾ (min ⁻¹)		作用點 位 置 (mm)	代 號 ⁽²⁾			
d	D	B	r (最小)	r ₁ (最小)	C _r	C _{0r}	C _r	C _{0r}	f ₀	脂潤滑	油潤滑	a	單 列	成 對 雙 聯		
100	140	20	1.1	0.6	47 500	51 500	4 850	5 250	—	5 600	8 000	38.0	7920 A5	DB	DF	DT
	140	20	1.1	0.6	50 000	54 000	5 100	5 550	16.5	6 700	9 000	26.1	7920 C	DB	DF	DT
	150	24	1.5	1	68 500	70 500	6 950	7 200	—	4 500	6 000	48.1	7020 A	DB	DF	DT
	150	24	1.5	1	75 500	77 000	7 700	7 900	16.0	6 300	9 000	28.7	7020 C	DB	DF	DT
	180	34	2.1	1.1	144 000	126 000	14 700	12 800	—	4 000	5 300	57.4	7220 A	DB	DF	DT
	180	34	2.1	1.1	130 000	114 000	13 300	11 700	—	2 800	3 800	75.7	7220 B	DB	DF	DT
	180	34	2.1	1.1	149 000	127 000	15 200	12 900	14.5	5 600	8 000	35.7	7220 C	DB	DF	DT
	215	47	3	1.1	207 000	193 000	21 100	19 700	—	2 800	3 800	69.0	7320 A	DB	DF	DT
	215	47	3	1.1	190 000	178 000	19 400	18 100	—	2 400	3 400	89.6	7320 B	DB	DF	DT
	215	47	3	1.1	190 000	178 000	19 400	18 100	—	2 400	3 400	89.6	7320 B	DB	DF	DT
105	145	20	1.1	0.6	48 000	54 000	4 900	5 500	—	5 600	7 500	39.2	7921 A5	DB	DF	DT
	145	20	1.1	0.6	51 000	57 000	5 200	5 800	16.6	6 300	9 000	26.7	7921 C	DB	DF	DT
	160	26	2	1	80 000	81 500	8 150	8 350	—	4 300	5 600	51.2	7021 A	DB	DF	DT
	160	26	2	1	88 000	89 500	9 000	9 100	15.9	6 000	8 500	30.7	7021 C	DB	DF	DT
	190	36	2.1	1.1	157 000	142 000	16 000	14 400	—	3 800	5 000	60.6	7221 A	DB	DF	DT
	190	36	2.1	1.1	142 000	129 000	14 500	13 100	—	2 600	3 600	79.9	7221 B	DB	DF	DT
	190	36	2.1	1.1	162 000	143 000	16 600	14 600	14.5	5 300	7 500	37.7	7221 C	DB	DF	DT
	225	49	3	1.1	208 000	193 000	21 200	19 700	—	2 600	3 600	72.1	7321 A	DB	DF	DT
	225	49	3	1.1	191 000	177 000	19 400	18 100	—	2 400	3 200	93.7	7321 B	DB	DF	DT
	225	49	3	1.1	191 000	177 000	19 400	18 100	—	2 400	3 200	93.7	7321 B	DB	DF	DT
110	150	20	1.1	0.6	49 000	56 000	5 000	5 750	—	5 300	7 100	40.3	7922 A5	DB	DF	DT
	150	20	1.1	0.6	52 000	59 500	5 300	6 050	16.7	6 300	8 500	27.4	7922 C	DB	DF	DT
	170	28	2	1	96 500	95 500	9 850	9 700	—	4 000	5 300	54.4	7022 A	DB	DF	DT
	170	28	2	1	106 000	104 000	10 800	10 600	15.6	5 600	8 000	32.7	7022 C	DB	DF	DT
	200	38	2.1	1.1	170 000	158 000	17 300	16 100	—	3 600	4 800	63.7	7222 A	DB	DF	DT
	200	38	2.1	1.1	154 000	144 000	15 700	14 700	—	2 600	3 400	84.0	7222 B	DB	DF	DT
	200	38	2.1	1.1	176 000	160 000	17 900	16 300	14.5	5 000	7 100	39.8	7222 C	DB	DF	DT
	240	50	3	1.1	220 000	215 000	22 500	21 900	—	2 600	3 400	75.5	7322 A	DB	DF	DT
	240	50	3	1.1	201 000	197 000	20 500	20 100	—	2 200	3 000	98.4	7322 B	DB	DF	DT
	240	50	3	1.1	201 000	197 000	20 500	20 100	—	2 200	3 000	98.4	7322 B	DB	DF	DT
120	165	22	1.1	0.6	67 500	77 000	6 900	7 850	—	4 800	6 300	44.2	7924 A5	DB	DF	DT
	165	22	1.1	0.6	72 000	81 000	7 300	8 300	16.5	5 600	7 500	30.1	7924 C	DB	DF	DT
	180	28	2	1	102 000	107 000	10 400	10 900	—	3 600	5 000	57.3	7024 A	DB	DF	DT
	215	40	2.1	1.1	183 000	177 000	18 600	18 100	—	3 200	4 500	68.3	7224 A	DB	DF	DT
	215	40	2.1	1.1	165 000	162 000	16 900	16 500	—	2 400	3 200	90.3	7224 B	DB	DF	DT
	260	55	3	1.1	246 000	252 000	25 100	25 700	—	2 200	3 000	82.3	7324 A	DB	DF	DT
	260	55	3	1.1	225 000	231 000	23 000	23 600	—	2 000	2 800	107.2	7324 B	DB	DF	DT
	260	55	3	1.1	225 000	231 000	23 000	23 600	—	2 000	2 800	107.2	7324 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為“—”者是根據d_a(最小)、r_a(最大)。




慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承


內徑 130~170 mm

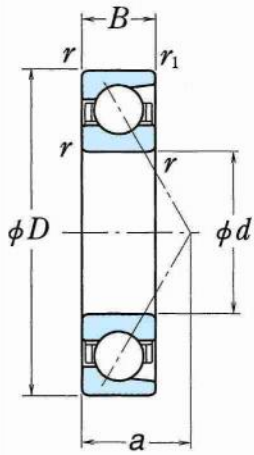


單 列

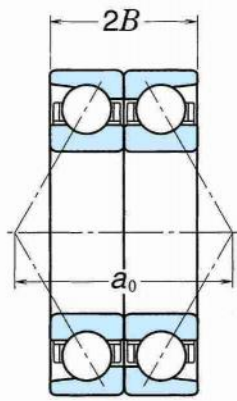

背面成對雙聯
DB

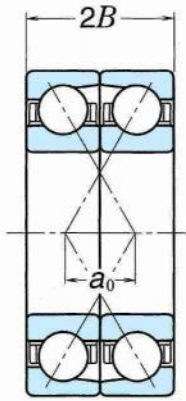

正面成對雙聯
DF

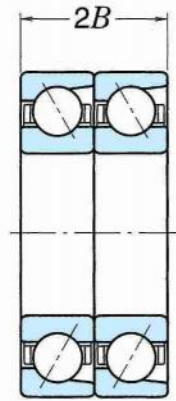

並列成對雙聯
DT

主 要 尺 寸 (mm)					基本額定負荷 (單列) (N)				係數	極 限 轉 速 (1) (min ⁻¹)		作用點 位 置 (mm)	代 號 (2)			
d	D	B	r (最小)	r ₁ (最小)	C _r	C _{0r}	C _r	C _{0r}	f ₀	脂潤滑	油潤滑	a	單 列	成 對 雙 聯		
130	180	24	1.5	1	74 000	86 000	7 550	8 750	—	4 300	6 000	48.1	7926 A5	DB	DF	DT
	180	24	1.5	1	78 500	91 000	8 000	9 250	16.5	5 000	7 100	32.8	7926 C	DB	DF	DT
	200	33	2	1	117 000	125 000	12 000	12 800	—	3 400	4 500	64.1	7026 A	DB	DF	DT
	230	40	3	1.1	189 000	193 000	19 300	19 600	—	2 400	3 200	72.0	7226 A	DB	DF	DT
	230	40	3	1.1	171 000	175 000	17 400	17 800	—	2 200	3 000	95.5	7226 B	DB	DF	DT
	280	58	4	1.5	273 000	293 000	27 900	29 800	—	2 200	2 800	88.2	7326 A	DB	DF	DT
	280	58	4	1.5	250 000	268 000	25 500	27 400	—	1 900	2 600	115.0	7326 B	DB	DF	DT
140	190	24	1.5	1	75 000	90 000	7 650	9 200	—	4 000	5 600	50.5	7928 A5	DB	DF	DT
	190	24	1.5	1	79 500	95 500	8 100	9 700	16.7	4 800	6 700	34.1	7928 C	DB	DF	DT
	210	33	2	1	120 000	133 000	12 200	13 500	—	3 200	4 300	67.0	7028 A	DB	DF	DT
	250	42	3	1.1	218 000	234 000	22 300	23 900	—	2 200	3 000	77.3	7228 A	DB	DF	DT
	250	42	3	1.1	197 000	213 000	20 100	21 700	—	2 000	2 800	102.8	7228 B	DB	DF	DT
	300	62	4	1.5	300 000	335 000	30 500	34 500	—	2 000	2 600	94.5	7328 A	DB	DF	DT
	300	62	4	1.5	275 000	310 000	28 100	31 500	—	1 700	2 400	123.3	7328 B	DB	DF	DT
150	210	28	2	1	96 500	115 000	9 850	11 800	—	3 800	5 000	56.0	7930 A5	DB	DF	DT
	210	28	2	1	102 000	122 000	10 400	12 400	16.6	4 300	6 000	38.1	7930 C	DB	DF	DT
	225	35	2.1	1.1	137 000	154 000	14 000	15 700	—	2 400	3 000	71.6	7030 A	DB	DF	DT
	270	45	3	1.1	248 000	280 000	25 300	28 500	—	2 000	2 800	83.1	7230 A	DB	DF	DT
	270	45	3	1.1	225 000	254 000	22 900	25 900	—	1 800	2 600	110.6	7230 B	DB	DF	DT
	320	65	4	1.5	315 000	370 000	32 500	38 000	—	1 800	2 400	100.3	7330 A	DB	DF	DT
	320	65	4	1.5	289 000	340 000	29 400	34 500	—	1 600	2 200	131.1	7330 B	DB	DF	DT
160	220	28	2	1	106 000	133 000	10 800	13 500	16.7	3 800	5 000	39.4	7932 C	DB	DF	DT
	240	38	2.1	1.1	155 000	176 000	15 800	18 000	—	2 200	2 800	76.7	7032 A	DB	DF	DT
	290	48	3	1.1	263 000	305 000	26 800	31 500	—	1 900	2 600	89.0	7232 A	DB	DF	DT
	290	48	3	1.1	238 000	279 000	24 200	28 400	—	1 700	2 400	118.4	7232 B	DB	DF	DT
	340	68	4	1.5	345 000	420 000	35 500	43 000	—	1 700	2 200	106.2	7332 A	DB	DF	DT
	340	68	4	1.5	315 000	385 000	32 000	39 500	—	1 500	2 000	138.9	7332 B	DB	DF	DT
170	230	28	2	1	113 000	148 000	11 500	15 100	16.8	3 600	4 800	40.8	7934 C	DB	DF	DT
	260	42	2.1	1.1	186 000	214 000	19 000	21 900	—	2 000	2 600	83.1	7034 A	DB	DF	DT
	310	52	4	1.5	295 000	360 000	30 000	36 500	—	1 800	2 400	95.3	7234 A	DB	DF	DT
	310	52	4	1.5	266 000	325 000	27 200	33 000	—	1 600	2 200	126.7	7234 B	DB	DF	DT
	360	72	4	1.5	390 000	485 000	39 500	49 500	—	1 600	2 200	112.5	7334 A	DB	DF	DT
	360	72	4	1.5	355 000	445 000	36 000	45 500	—	1 400	2 000	147.2	7334 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為"—" 者是根據d_a(最小)、r_a(最大)。




慶順五金・軸承
WWW.CS1970.COM.TW

單列斜角滾珠軸承・成對雙聯斜角滾珠軸承


內徑 180~200 mm

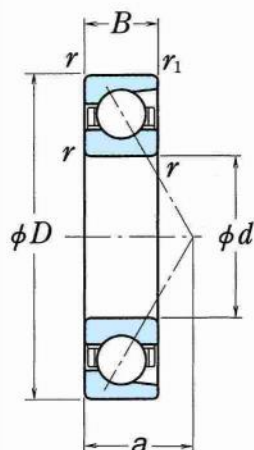


單 列

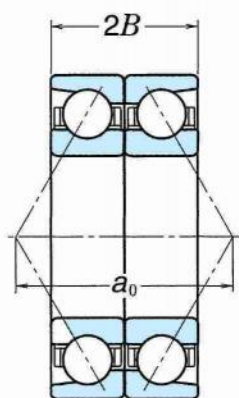

背面成對雙聯
DB

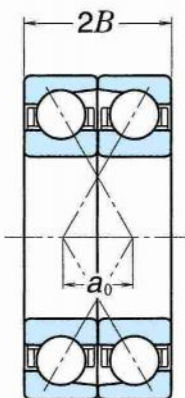

正面成對雙聯
DF

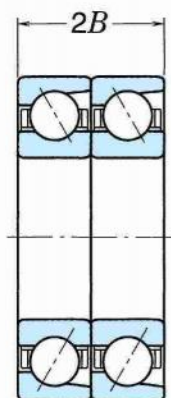

並列成對雙聯
DT

主 要 尺 寸 (mm)					基本額定負荷 (單列) (N) {kgf}				係數	極限轉速 ⁽¹⁾ (min ⁻¹)		作用點 位 置 (mm)	代 號 ⁽²⁾			
d	D	B	r (最小)	r ₁ (最小)	C _r	C _{0r}	C _r	C _{0r}	f ₀	脂潤滑	油潤滑	a	單 列	成 對 雙 聯		
180	250	33	2	1	145 000	184 000	14 800	18 800	16.6	3 200	4 500	45.3	7936 C	DB	DF	DT
	280	46	2.1	1.1	207 000	252 000	21 100	25 700	—	1 900	2 400	89.4	7036 A	DB	DF	DT
	320	52	4	1.5	305 000	385 000	31 000	39 000	—	1 700	2 200	98.2	7236 A	DB	DF	DT
	320	52	4	1.5	276 000	350 000	28 100	35 500	—	1 500	2 000	130.9	7236 B	DB	DF	DT
	380	75	4	1.5	410 000	535 000	41 500	54 500	—	1 500	2 000	118.3	7336 A	DB	DF	DT
	380	75	4	1.5	375 000	490 000	38 000	50 000	—	1 300	1 800	155.0	7336 B	DB	DF	DT
190	260	33	2	1	147 000	192 000	15 000	19 600	16.7	3 000	4 300	46.6	7938 C	DB	DF	DT
	290	46	2.1	1.1	224 000	280 000	22 800	28 600	—	1 800	2 400	92.3	7038 A	DB	DF	DT
	340	55	4	1.5	315 000	410 000	32 000	42 000	—	1 600	2 200	104.0	7238 A	DB	DF	DT
	340	55	4	1.5	284 000	375 000	28 900	38 000	—	1 400	2 000	138.7	7238 B	DB	DF	DT
	400	78	5	2	450 000	600 000	46 000	61 000	—	1 400	1 900	124.2	7338 A	DB	DF	DT
	400	78	5	2	410 000	550 000	42 000	56 000	—	1 300	1 700	162.8	7338 B	DB	DF	DT
200	280	38	2.1	1.1	189 000	244 000	19 300	24 900	16.5	2 800	4 000	51.2	7940 C	DB	DF	DT
	310	51	2.1	1.1	240 000	310 000	24 500	31 500	—	1 700	2 200	99.1	7040 A	DB	DF	DT
	360	58	4	1.5	335 000	450 000	34 500	46 000	—	1 500	2 000	109.8	7240 A	DB	DF	DT
	360	58	4	1.5	305 000	410 000	31 000	41 500	—	1 300	1 800	146.5	7240 B	DB	DF	DT
	420	80	5	2	475 000	660 000	48 500	67 000	—	1 300	1 800	129.5	7340 A	DB	DF	DT
	420	80	5	2	430 000	600 000	44 000	61 500	—	1 200	1 600	170.1	7340 B	DB	DF	DT

註 (1) 有關極限轉速的適用事宜

(2) 代號A、A5、B及C分別代表其公稱接觸角為30°、25°、40°及15°。


(3) d_b欄中為“—”者是根據d_a(最小)、r_a(最大)。



慶順五金・軸承
WWW.CS1970.COM.TW

雙列斜角滾珠軸承

內徑 10~85 mm

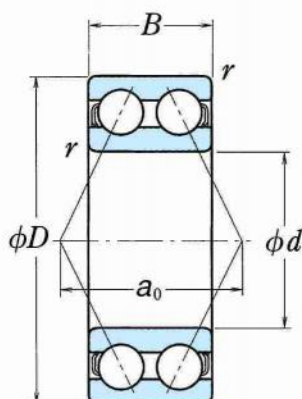


主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號
d	D	B	r (最小)	C _r	C _{0r}	C _r	C _{0r}	脂潤滑	油潤滑	
10	30	14.3	0.6	7 150	3 900	730	400	17 000	22 000	5200
12	32	15.9	0.6	10 500	5 800	1 070	590	15 000	20 000	5201
15	35	15.9	0.6	11 700	7 050	1 190	715	13 000	17 000	5202
	42	19	1	17 600	10 200	1 800	1 040	11 000	15 000	5302
17	40	17.5	0.6	14 600	9 050	1 490	920	11 000	15 000	5203
	47	22.2	1	21 000	12 600	2 140	1 280	10 000	13 000	5303
20	47	20.6	1	19 600	12 400	2 000	1 270	10 000	13 000	5204
	52	22.2	1.1	24 600	15 000	2 510	1 530	9 000	12 000	5304
25	52	20.6	1	21 300	14 700	2 170	1 500	8 500	11 000	5205
	62	25.4	1.1	32 500	20 700	3 350	2 110	7 500	10 000	5305
30	62	23.8	1	29 600	21 100	3 000	2 150	7 100	9 500	5206
	72	30.2	1.1	40 500	28 100	4 150	2 870	6 300	8 500	5306
35	72	27	1.1	39 000	28 700	4 000	2 920	6 300	8 000	5207
	80	34.9	1.5	51 000	36 000	5 200	3 700	5 600	7 500	5307
40	80	30.2	1.1	44 000	33 500	4 500	3 400	5 600	7 100	5208
	90	36.5	1.5	56 500	41 000	5 800	4 200	5 300	6 700	5308
45	85	30.2	1.1	49 500	38 000	5 050	3 900	5 000	6 700	5209
	100	39.7	1.5	68 500	51 000	7 000	5 200	4 500	6 000	5309
50	90	30.2	1.1	53 000	43 500	5 400	4 400	4 800	6 000	5210
	110	44.4	2	81 500	61 500	8 300	6 250	4 300	5 600	5310
55	100	33.3	1.5	56 000	49 000	5 700	5 000	4 300	5 600	5211
	120	49.2	2	95 000	73 000	9 700	7 450	3 800	5 000	5311
60	110	36.5	1.5	69 000	62 000	7 050	6 300	3 800	5 000	5212
	130	54	2.1	125 000	98 500	12 800	10 000	3 400	4 500	5312
65	120	38.1	1.5	76 500	69 000	7 800	7 050	3 600	4 500	5213
	140	58.7	2.1	142 000	113 000	14 500	11 500	3 200	4 300	5313
70	125	39.7	1.5	94 000	82 000	9 600	8 400	3 400	4 500	5214
	150	63.5	2.1	159 000	128 000	16 200	13 100	3 000	3 800	5314
75	130	41.3	1.5	93 500	83 000	9 550	8 500	3 200	4 300	5215
80	140	44.4	2	99 000	93 000	10 100	9 500	3 000	3 800	5216
85	150	49.2	2	116 000	110 000	11 800	11 200	2 800	3 600	5217



慶順五金·軸承
WWW.CS1970.COM.TW

4點接觸滾珠軸承

內徑 30~95 mm

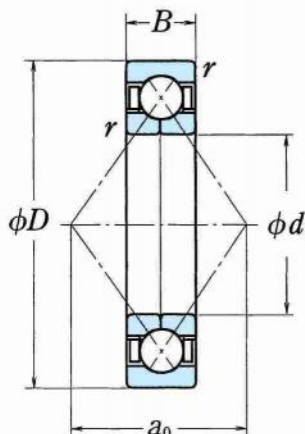

主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號
d	D	B	r (最小)	C _a	C _{0a}	C _a	C _{0a}	脂潤滑	油潤滑	
30	62	16	1	31 000	45 000	3 150	4 600	8 500	12 000	QJ 206
	72	19	1.1	46 000	63 000	4 700	6 450	8 000	11 000	QJ 306
35	72	17	1.1	41 000	61 500	4 200	6 250	7 500	10 000	QJ 207
	80	21	1.5	55 000	80 000	5 600	8 150	7 100	9 500	QJ 307
40	80	18	1.1	49 000	77 500	5 000	7 900	6 700	9 000	QJ 208
	90	23	1.5	67 000	100 000	6 850	10 200	6 300	8 500	QJ 308
45	85	19	1.1	55 000	88 500	5 600	9 000	6 300	8 500	QJ 209
	100	25	1.5	87 500	133 000	8 900	13 500	5 600	7 500	QJ 309
50	90	20	1.1	57 000	97 000	5 850	9 900	5 600	8 000	QJ 210
	110	27	2	102 000	159 000	10 400	16 200	5 000	6 700	QJ 310
55	100	21	1.5	71 000	122 000	7 200	12 500	5 300	7 100	QJ 211
	120	29	2	118 000	187 000	12 000	19 100	4 500	6 300	QJ 311
60	110	22	1.5	85 500	150 000	8 750	15 300	4 800	6 300	QJ 212
	130	31	2.1	135 000	217 000	13 800	22 200	4 300	5 600	QJ 312
65	120	23	1.5	97 500	179 000	9 950	18 300	4 300	6 000	QJ 213
	140	33	2.1	153 000	250 000	15 600	25 500	3 800	5 300	QJ 313
70	125	24	1.5	106 000	197 000	10 800	20 100	4 000	5 600	QJ 214
	150	35	2.1	172 000	285 000	17 500	29 100	3 600	5 000	QJ 314
75	130	25	1.5	110 000	212 000	11 200	21 700	3 800	5 300	QJ 215
	160	37	2.1	187 000	320 000	19 100	33 000	3 400	4 800	QJ 315
80	125	22	1.1	77 000	167 000	7 850	17 000	3 800	5 300	QJ 1016
	140	26	2	124 000	236 000	12 600	24 100	3 600	5 000	QJ 216
	170	39	2.1	202 000	360 000	20 600	37 000	3 200	4 300	QJ 316
85	130	22	1.1	79 000	176 000	8 050	18 000	3 800	5 000	QJ 1017
	150	28	2	143 000	276 000	14 600	28 200	3 400	4 800	QJ 217
	180	41	3	218 000	405 000	22 300	41 000	3 000	4 000	QJ 317
90	140	24	1.5	94 000	208 000	9 600	21 200	3 400	4 800	QJ 1018
	160	30	2	164 000	320 000	16 700	32 500	3 200	4 300	QJ 218
	190	43	3	235 000	450 000	23 900	45 500	2 800	3 800	QJ 318
95	145	24	1.5	96 500	220 000	9 800	22 500	3 400	4 500	QJ 1019
	170	32	2.1	177 000	340 000	18 000	35 000	3 000	4 000	QJ 219
	200	45	3	251 000	495 000	25 600	50 500	2 600	3 600	QJ 319


備 註 欲使用4點接觸滾珠軸承之際，請向提出諮詢。



慶順五金·軸承
WWW.CS1970.COM.TW

4點接觸滾珠軸承

內徑 100~200 mm

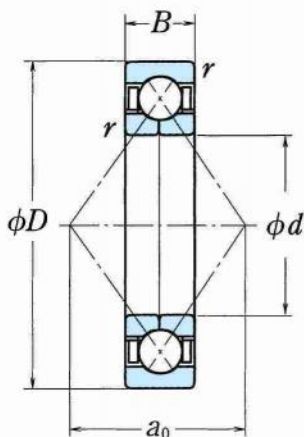

主要尺寸 (mm)				基本額定負荷 (N) {kgf}				極限轉速 (min ⁻¹)		代 號
d	D	B	r (最小)	C _a	C _{0a}	C _a	C _{0a}	脂潤滑	油潤滑	
100	150	24	1.5	98 500	232 000	10 000	23 700	3 200	4 300	QJ 1020
	180	34	2.1	199 000	390 000	20 300	39 500	2 800	3 800	QJ 220
	215	47	3	300 000	640 000	31 000	65 500	2 400	3 400	QJ 320
105	160	26	2	115 000	269 000	11 800	27 400	3 000	4 000	QJ 1021
	190	36	2.1	217 000	435 000	22 100	44 500	2 600	3 600	QJ 221
	225	49	3	305 000	640 000	31 000	65 500	2 400	3 200	QJ 321
110	170	28	2	139 000	315 000	14 200	32 000	2 800	3 800	QJ 1022
	200	38	2.1	235 000	490 000	24 000	50 000	2 600	3 400	QJ 222
	240	50	3	320 000	710 000	32 500	72 500	2 200	3 000	QJ 322
120	180	28	2	147 000	350 000	15 000	36 000	2 600	3 600	QJ 1024
	215	40	2.1	265 000	585 000	27 000	60 000	2 400	3 200	QJ 224
	260	55	3	360 000	835 000	36 500	85 500	2 000	2 800	QJ 324
130	200	33	2	169 000	415 000	17 300	42 000	2 400	3 200	QJ 1026
	230	40	3	274 000	635 000	28 000	65 000	2 200	3 000	QJ 226
	280	58	4	400 000	970 000	40 500	99 000	1 900	2 600	QJ 326
140	210	33	2	172 000	435 000	17 600	44 500	2 200	3 000	QJ 1028
	250	42	3	315 000	775 000	32 000	79 000	2 000	2 800	QJ 228
	300	62	4	440 000	1 110 000	44 500	114 000	1 700	2 400	QJ 328
150	225	35	2.1	197 000	505 000	20 100	51 500	2 000	2 800	QJ 1030
	270	45	3	360 000	925 000	36 500	94 500	1 800	2 600	QJ 230
	320	65	4	460 000	1 230 000	47 000	125 000	1 600	2 200	QJ 330
160	240	38	2.1	224 000	580 000	22 800	59 000	1 900	2 600	QJ 1032
	290	48	3	380 000	1 010 000	39 000	103 000	1 700	2 400	QJ 232
	340	68	4	505 000	1 400 000	51 500	143 000	1 500	2 000	QJ 332
170	260	42	2.1	268 000	705 000	27 300	72 000	1 800	2 400	QJ 1034
	310	52	4	425 000	1 180 000	43 500	121 000	1 600	2 200	QJ 234
	360	72	4	565 000	1 610 000	57 500	164 000	1 400	2 000	QJ 334
180	280	46	2.1	299 000	830 000	30 500	84 500	1 700	2 200	QJ 1036
	320	52	4	440 000	1 270 000	45 000	130 000	1 500	2 000	QJ 236
	380	75	4	595 000	1 770 000	60 500	180 000	1 300	1 800	QJ 336
190	290	46	2.1	325 000	925 000	33 000	94 000	1 600	2 200	QJ 1038
	340	55	4	455 000	1 360 000	46 500	139 000	1 400	2 000	QJ 238
	400	78	5	655 000	1 980 000	67 000	202 000	1 300	1 700	QJ 338
200	310	51	2.1	345 000	1 020 000	35 500	104 000	1 500	2 000	QJ 1040
	360	58	4	490 000	1 480 000	49 500	151 000	1 300	1 800	QJ 240
	420	80	5	690 000	2 180 000	70 500	222 000	1 200	1 600	QJ 340

備 註 欲使用4點接觸滾珠軸承之際，請向提出諮詢。



慶順五金·軸承
WWW.CS1970.COM.TW